

Heat shrinkable cable termination  
for unarmoured polymeric cables

Universally suitable to terminate polymeric cables and electrical equipment. Suitable for cables insulated with PE, VPE, PVC und cable sheaths insulated with PVC or PE suitable for compression lugs on aluminium and copper conductors.



Product description


Article name	SFEH4 25-50
Article number	145438
Optional accessory	Compression cable lugs (see Connecting technology)

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
High electrical insulating values
High mechanical strength

Applications
Indoor



Technical data

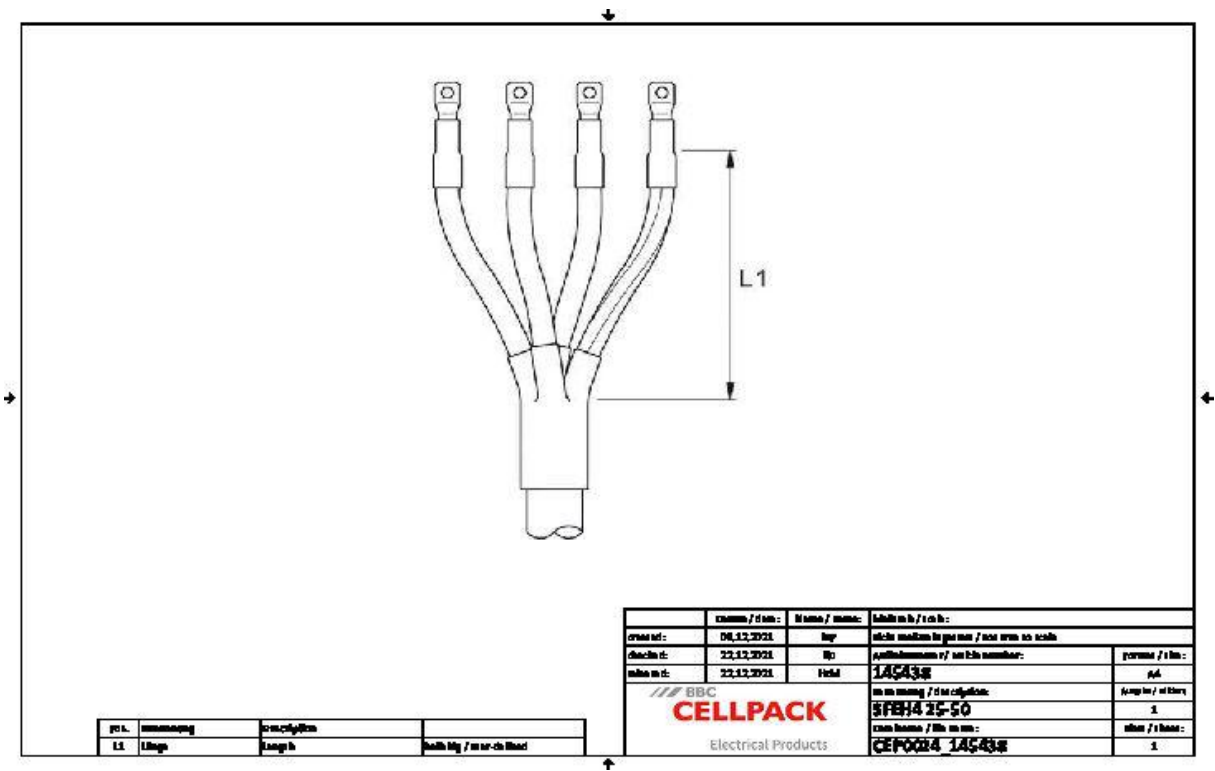

Article name	SFEH4 25-50
Article number	145438
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Nominal cross section Polymeric cable unarmoured per conductor 4x min	25 mm²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	50 mm²



## Logistics data

Article name	SFEH4 25-50
Article number	145438
Delivery scope	Spreader cap
	Sealing tubes
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39174000
EAN/GTIN	4010311004617

## Packaging data

Alternative unit of measure	Bag1	Carton	Pal. OW
Base quantity	1	150	500
Base unit of measure	Piece	Piece	Piece
Lenght (mm)	208	800	1200
Width (mm)	191	620	800
Height (mm)	70	520	1130
Net weight (kg)	0.115	17.25	57.5
Gross weight (kg)	0.115	17.55	75.7