

Heat shrinkable cable termination

for unarmoured polymeric cables

Universally suitable to terminate polymeric cables and electrical equipment. Suitable for cables insulated with PE, VPE, PVC und cable sheaths insulated with PVC or PE suitable for compression lugs on aluminium and copper conductors.




Product description

Article name	SFEH4 150-300
Article number	145448
Optional accessory	Compression cable lugs (see Connecting technology)

Characteristics	Applications
Compact dimensions	Indoor
Wide conductor and cross-section range	
Resistant to chemical agents	
Stabilized against UV rays	
Free from paint-wetting inhibiting substances	
Halogen-free	
High electrical insulating values	
High mechanical strength	

Technical data

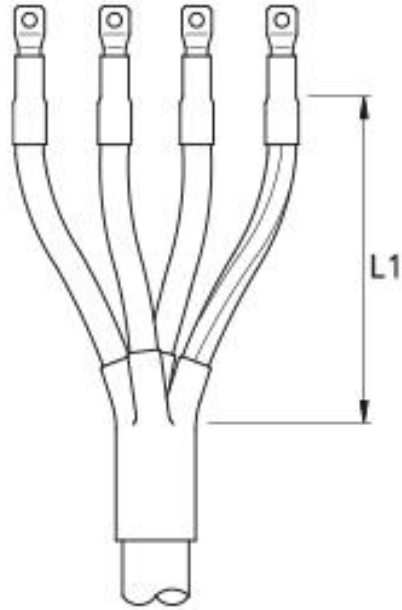

Article name	SFEH4 150-300
Article number	145448
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Nominal cross section Polymeric cable unarmoured per conductor 4x min	150 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	300 mm ²

Logistics data

Article name	SFEH4 150-300
Article number	145448
Delivery scope	Spreader cap
	Sealing tubes
	Cleaning tissue
	Emery cloth
	Installation instruction
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39174000
EAN/GTIN	4010311004631

Packaging data

Packaging type	Bag1	Pal. OW
Content quantity	1	100
Unit of measure	Piece	Piece
Length (mm)	237	1200
Width (mm)	201	800
Height (mm)	110	770
Net weight (kg)	0.257	25.7
Gross weight (kg)	0.257	43.9