

Heat shrinkable cable termination

for unarmoured polymeric cables and conductors

Universally suitable for connecting the polymeric-insulated cables to electrical equipment, for cables insulated with PE, XLPE, PVC and cable sheaths insulated with PVC or PE. Suitable for compression cable lugs on aluminium and copper cables.



Product description

Article name	SFEX4 70-150
Article number	145444
Notes	SFEX4 for power cables with green-yellow wire marking Waterproof cable lugs must be used for outdoor cable terminations.
Optional accessory	Compression cable lugs (see Connecting technology)


Characteristics

Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
100 % waterproof
High electrical insulating values
High mechanical strength

Applications

Outdoor
---------

Technical data

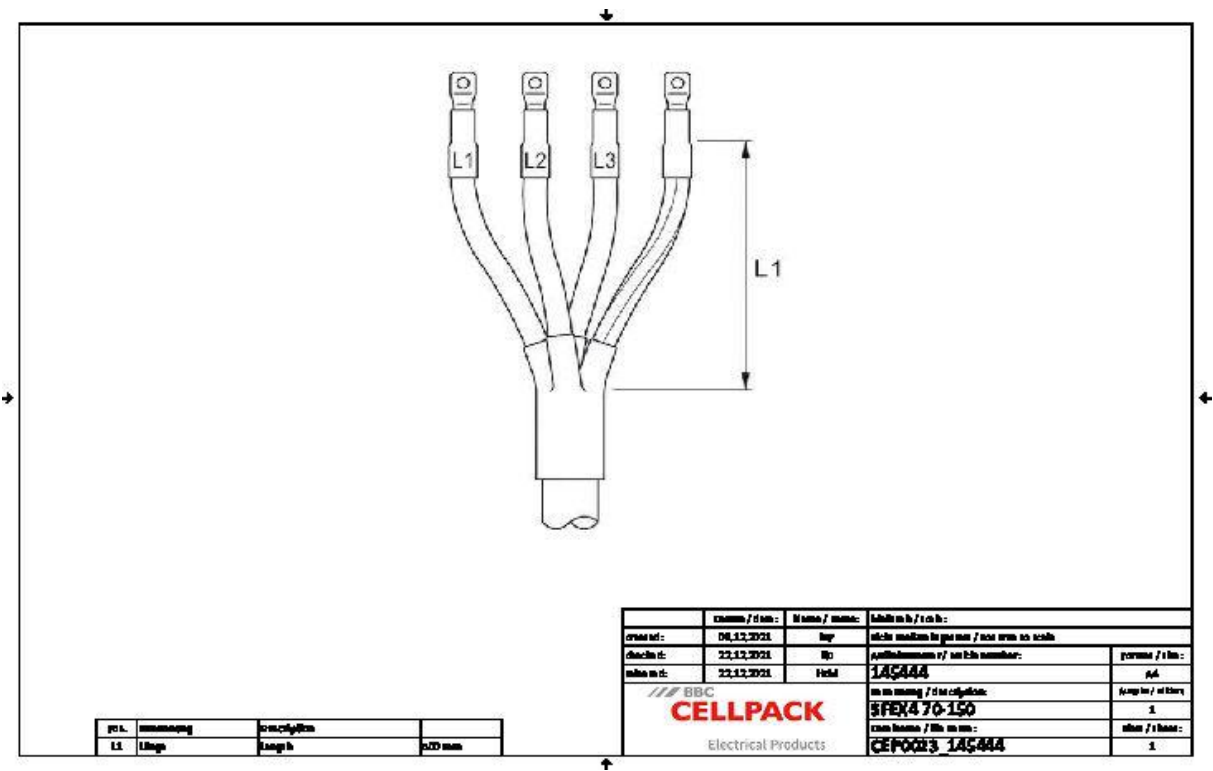

Article name	SFEX4 70-150
Article number	145444
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Nominal cross section Polymeric cable unarmoured per conductor 4x min	70 mm²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	150 mm²

## Logistics data

Article name	SFEX4 70-150
Article number	145444
Delivery scope	Core insulating tubes
	Spreader cap
	Sealing tubes
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39174000
EAN/GTIN	4010311004709

## Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	10
Base unit of measure	Piece	Piece
Length (mm)	509	580
Width (mm)	221	385
Height (mm)	75	335
Net weight (kg)	0.332	3.32
Gross weight (kg)	0.332	3.62