

## Heat shrinkable cable termination for unarmoured polymeric cables and conductors

Universally suitable for connecting the polymeric-insulated cables to electrical equipment, for cables insulated with PE, XLPE, PVC and cable sheaths insulated with PVC or PE. Suitable for compression cable lugs on aluminium and copper cables.




### Product description

Article name	SFEX4 150-300
Article number	145449
Notes	SFEX4 for power cables with green-yellow wire marking Waterproof cable lugs must be used for outdoor cable terminations.
Optional accessory	Compression cable lugs (see Connecting technology)

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
100 % waterproof
High electrical insulating values
High mechanical strength

Applications
Outdoor

Technical data

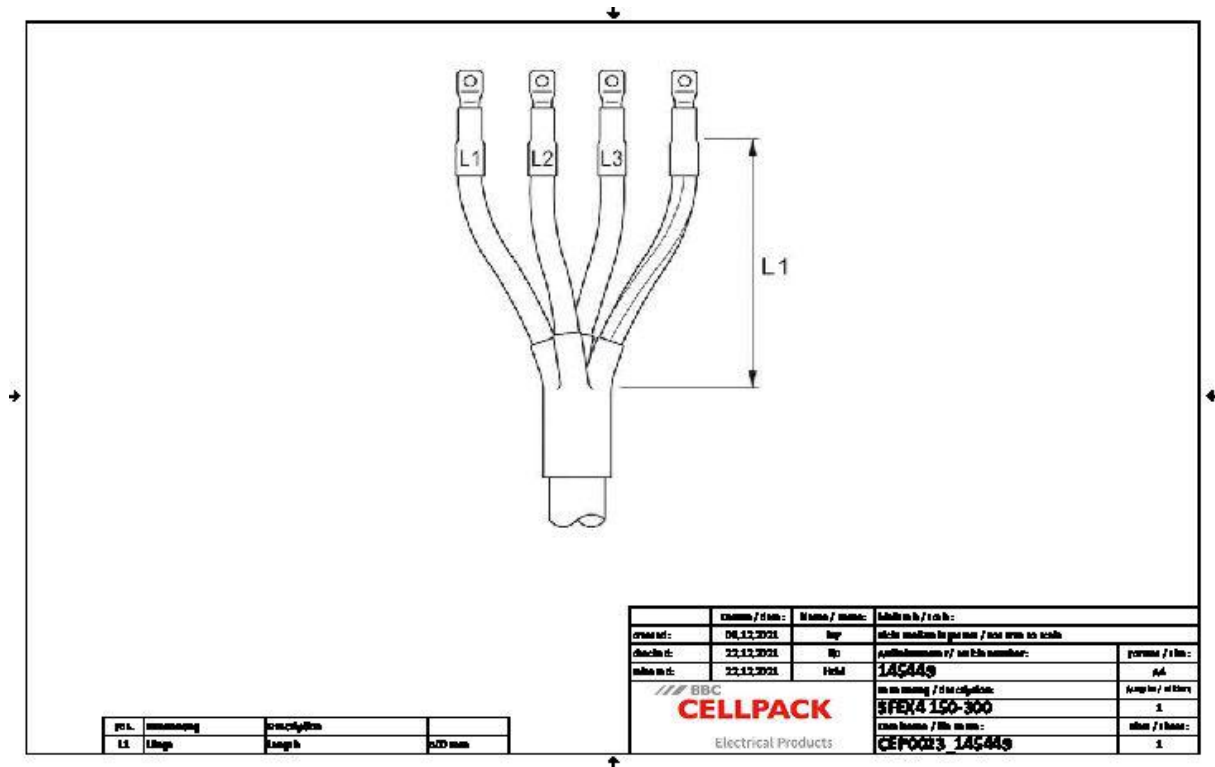

Article name	SFEX4 150-300
Article number	145449
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Nominal cross section Polymeric cable unarmoured per conductor 4x min	150 mm <sup>2</sup>
Nominal cross section Polymeric cable unarmoured per conductor 4x max	300 mm <sup>2</sup>

## Logistics data

Article name	SFEX4 150-300
Article number	145449
Delivery scope	Core insulating tubes
	Spreader cap
	Sealing tubes
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39174000
EAN/GTIN	4010311004716

## Packaging data

Alternative unit of measure	Bag1
Base quantity	1
Base unit of measure	Piece
Length (mm)	620
Width (mm)	215
Height (mm)	105
Net weight (kg)	0.469
Gross weight (kg)	0.469