


Heat shrinkable end cap

with adhesive optionally with additional sealing material

Heat shrinkable end caps SKH with adhesive, SKHD with additional sealing material, protection against humidity and pressure for cables, conductors and pipes with a diameter of 5 - 105 mm.

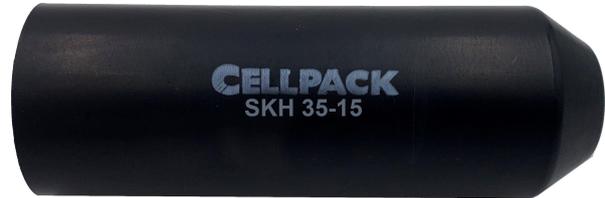

Product description

| | |
|----------------|--|
| Article name | SKH 35-15 |
| Article number | 125335 |
| Notes | Recovered dimension after shrinking with adhesive |


Characteristics

Resistant to chemical agents
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Superior electrical properties
Pressure-tight
High mechanical strength
100 % waterproof

Applications

Protection against moisture and pressure for cables, conductors and pipes

Technical data

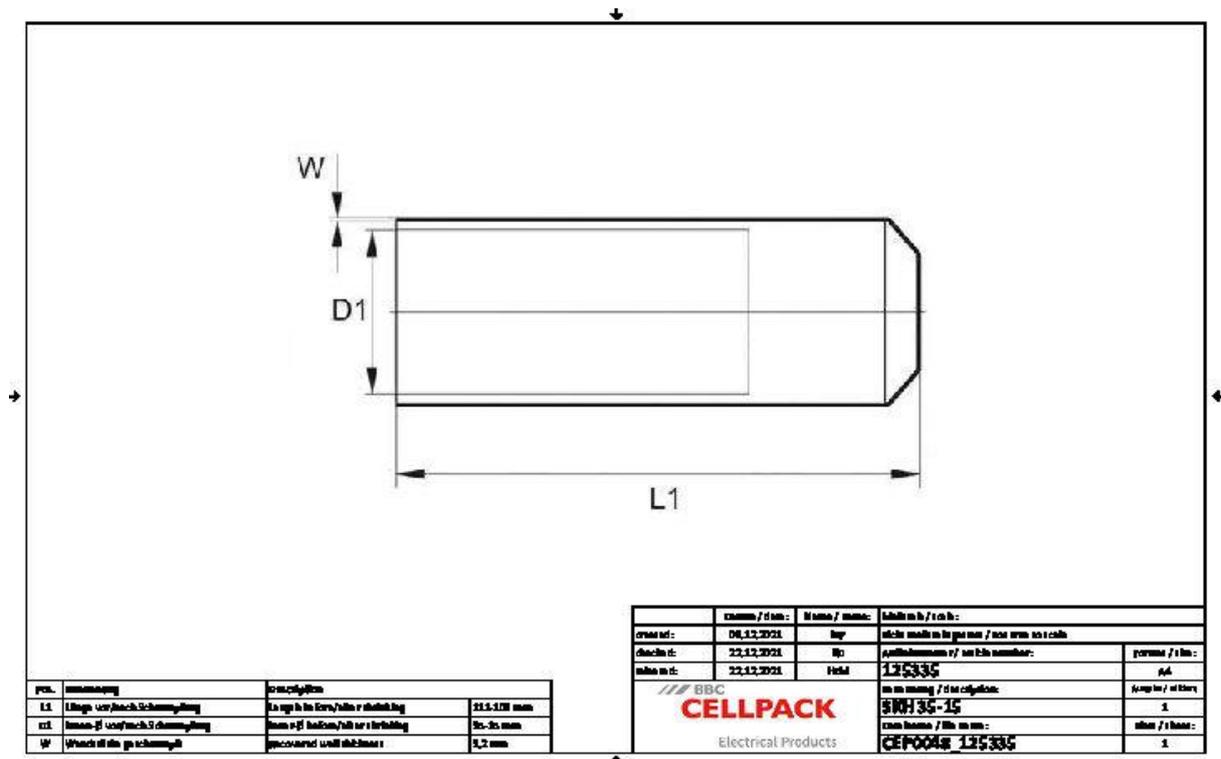

| | |
|--|---|
| Article name | SKH 35-15 |
| Article number | 125335 |
| Test standards | IEC 60684-2 |
| Materials | Cross-linked polyolefin Free of lead and cadmium |
| Article notes | with adhesive |
| Selection Note | with adhesive |
| Length L1 | 111 mm |
| Length L1* | 103 mm |
| Colours | black |
| Inner diameter before shrinking (mm) | 35 mm |
| Inner diameter after shrinking (mm) | 15 mm |
| Recovered wall thickness | 3.2 mm |
| Elongation at break | 300 % |
| Elongation at break (associated standard) | IEC 62677-2 |
| Tensile strength at break | 10 MPa |
| Tensile strength at break (associated standard) | IEC 62677-2 |
| Operating temperature range min | -40 °C |
| Operating temperature range max | 100 °C |
| Operating temperature range (associated standard) | IEC 62677-2 |
| Shrinkage temperature | > 110 °C |
| Burning behaviour | not self-extinguishing |
| Burning behaviour (associated standard) | IEC 60684-2 |
| Flexibility at low temperatures | -40 °C |
| Flexibility at low temperatures (associated standard) | IEC 62677-2 |
| Thermal ageing (168 h at 150 °C): Elongation at break | 200 % |
| Thermal ageing (168 h bei 150 °C): Tensile strength at break | 8 MPa |
| Thermal ageing (168 h bei 150 °C) (associated standard) | IEC 62677-2 |
| Specific volume resistivity | 10 ¹² Ω cm |
| Specific volume resistivity (associated standard) | IEC 60243-2 |

| | |
|--|-------------|
| Dielectric strength | 10 kV/mm |
| Dielectric strength (associated standard) | IEC 60243-1 |
| Corrosion | none |
| Corrosion (associated standard) | EN 62677-2 |
| Resistance to fungus and decay | Rate 1 |
| Resistance to fungus and decay (associated standard) | IEC 62677-2 |

Logistics data

| | |
|------------------------|-------------------------|
| Article name | SKH 35-15 |
| Article number | 125335 |
| Delivery scope | Heat shrinkable end cap |
| Shelf life description | Unlimited shelf life |
| Country of origin | India |
| Customs tariff number | 39174000 |
| EAN/GTIN | 4010311005164 |

Packaging data

| | | |
|-----------------------------|-------|---------|
| Alternative unit of measure | Bag | Pal. OW |
| Base quantity | 20 | 4400 |
| Base unit of measure | Piece | Piece |
| Length (mm) | 400 | 1200 |
| Width (mm) | 220 | 800 |
| Height (mm) | 40 | 1150 |
| Net weight (kg) | 0.5 | 110 |
| Gross weight (kg) | 0.505 | 128.2 |