


Heat shrinkable end cap

with adhesive optionally with additional sealing material

Heat shrinkable end caps SKH with adhesive, SKHD with additional sealing material, protection against humidity and pressure for cables, conductors and pipes with a diameter of 5 - 105 mm.

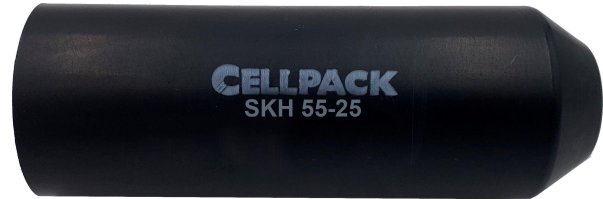

Product description

Article name	SKH 55-25
Article number	125336
Notes	Recovered dimension after shrinking with adhesive


Characteristics

Resistant to chemical agents
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Superior electrical properties
Pressure-tight
High mechanical strength
100 % waterproof

Applications

Protection against moisture and pressure for cables, conductors and pipes

Technical data

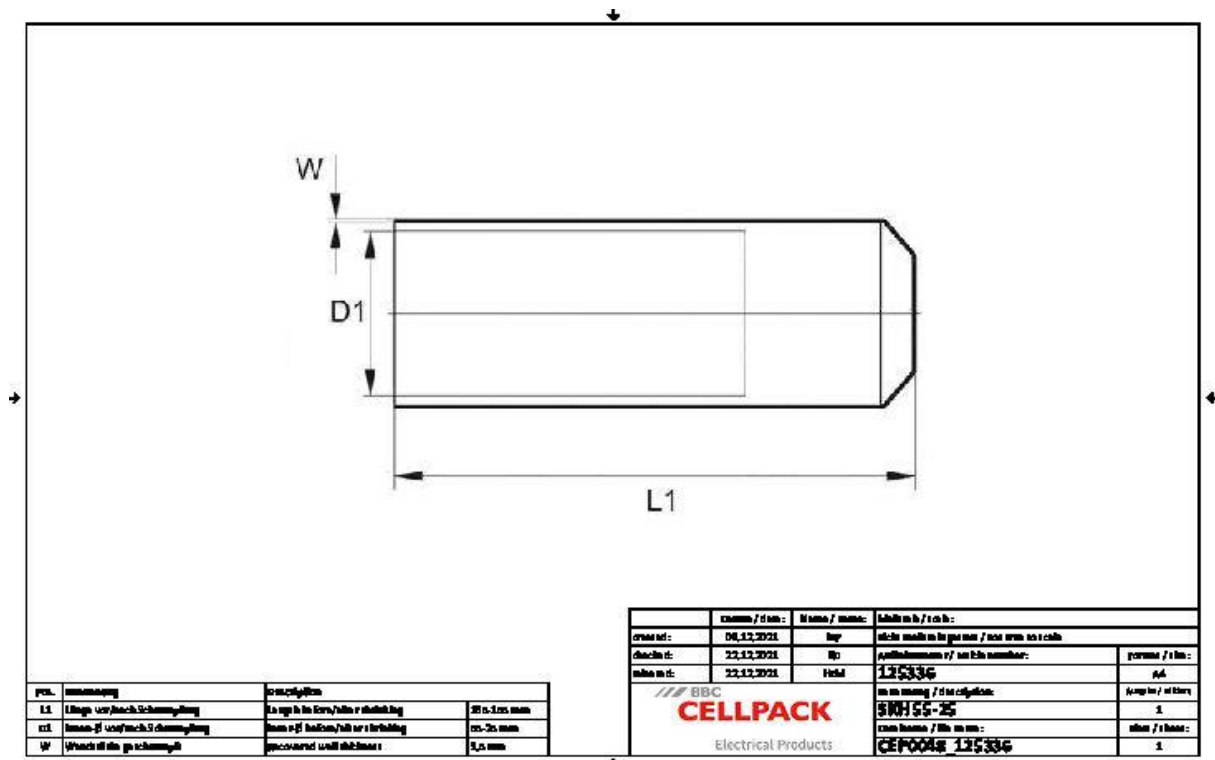

Article name	SKH 55-25
Article number	125336
Test standards	IEC 60684-2
Materials	Cross-linked polyolefin Free of lead and cadmium
Article notes	with adhesive
Selection Note	with adhesive
Length L1	165 mm
Length L1*	155 mm
Colours	black
Inner diameter before shrinking (mm)	55 mm
Inner diameter after shrinking (mm)	25 mm
Recovered wall thickness	3.5 mm
Elongation at break	300 %
Elongation at break (associated standard)	IEC 62677-2
Tensile strength at break	10 MPa
Tensile strength at break (associated standard)	IEC 62677-2
Operating temperature range min	-40 °C
Operating temperature range max	100 °C
Operating temperature range (associated standard)	IEC 62677-2
Shrinkage temperature	> 110 °C
Burning behaviour	not self-extinguishing
Burning behaviour (associated standard)	IEC 60684-2
Flexibility at low temperatures	-40 °C
Flexibility at low temperatures (associated standard)	IEC 62677-2
Thermal ageing (168 h at 150 °C): Elongation at break	200 %
Thermal ageing (168 h bei 150 °C): Tensile strength at break	8 MPa
Thermal ageing (168 h bei 150 °C) (associated standard)	IEC 62677-2
Specific volume resistivity	10 ¹² Ω cm
Specific volume resistivity (associated standard)	IEC 60243-2

Dielectric strength	10 kV/mm
Dielectric strength (associated standard)	IEC 60243-1
Corrosion	none
Corrosion (associated standard)	EN 62677-2
Resistance to fungus and decay	Rate 1
Resistance to fungus and decay (associated standard)	IEC 62677-2

Logistics data

Article name	SKH 55-25
Article number	125336
Delivery scope	Heat shrinkable end cap
Shelf life description	Unlimited shelf life
Country of origin	India
Customs tariff number	39174000
EAN/GTIN	4010311005171

Packaging data

Alternative unit of measure	Bag	Carton	Pal. OW
Base quantity	20	300	1200
Base unit of measure	Piece	Piece	Piece
Length (mm)	150	490	1200
Width (mm)	62	490	800
Height (mm)	62	590	1150
Net weight (kg)	0.78	11.7	46.8
Gross weight (kg)	0.785	12	57.2