

Heat shrinkable straight-through joint
for armoured polymeric cables

Universally suitable for connecting light armoured polymeric cables insulated with PVC, PE and XLPE (e.g. GN-CLN). Suitable for compression connectors.




Product description

Article name	SMDH 1.5-10
Article number	126740
Optional accessory	Compression connectors (see Connecting technology)

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength
Ready for immediate operation

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

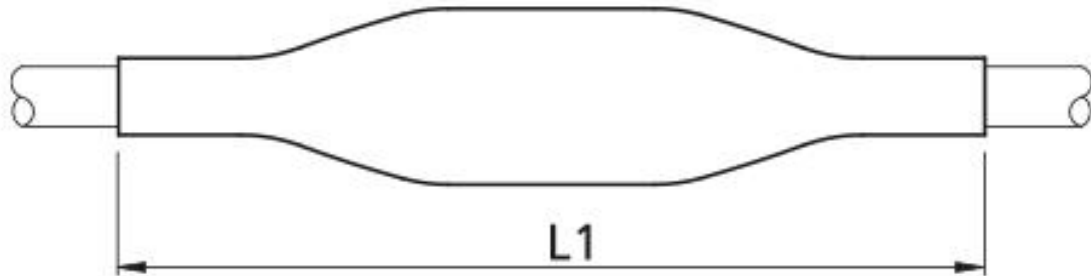

Article name	SMDH 1.5-10
Article number	126740
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	330 mm
Nominal cross section Polymeric cable armoured per conductor 4x min	1.5 mm ²
Nominal cross section Polymeric cable armoured per conductor 4x max	10 mm ²

Logistics data

Article name	SMDH 1.5-10
Article number	126740
Delivery scope	Outer sleeve
	Inner sleeves
	Inner protective sleeve (belt sleeve)
	Copper braid tape
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39174000
EAN/GTIN	4010311048291

Packaging data

Packaging type	Bag1	Carton
Content quantity	1	30
Unit of measure	Piece	Piece
Length (mm)	420	475
Width (mm)	138	405
Height (mm)	45	370
Net weight (kg)	0.164	4.92
Gross weight (kg)	0.164	5.22