

Heat shrinkable straight-through joint
for flexible cables

Universally suitable for connecting conductors insulated with EPR (e.g. A07RN-F, H07RN-F). Suitable for compression connectors.




Product description

Article name	SMH4G 16-50
Article number	145481

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

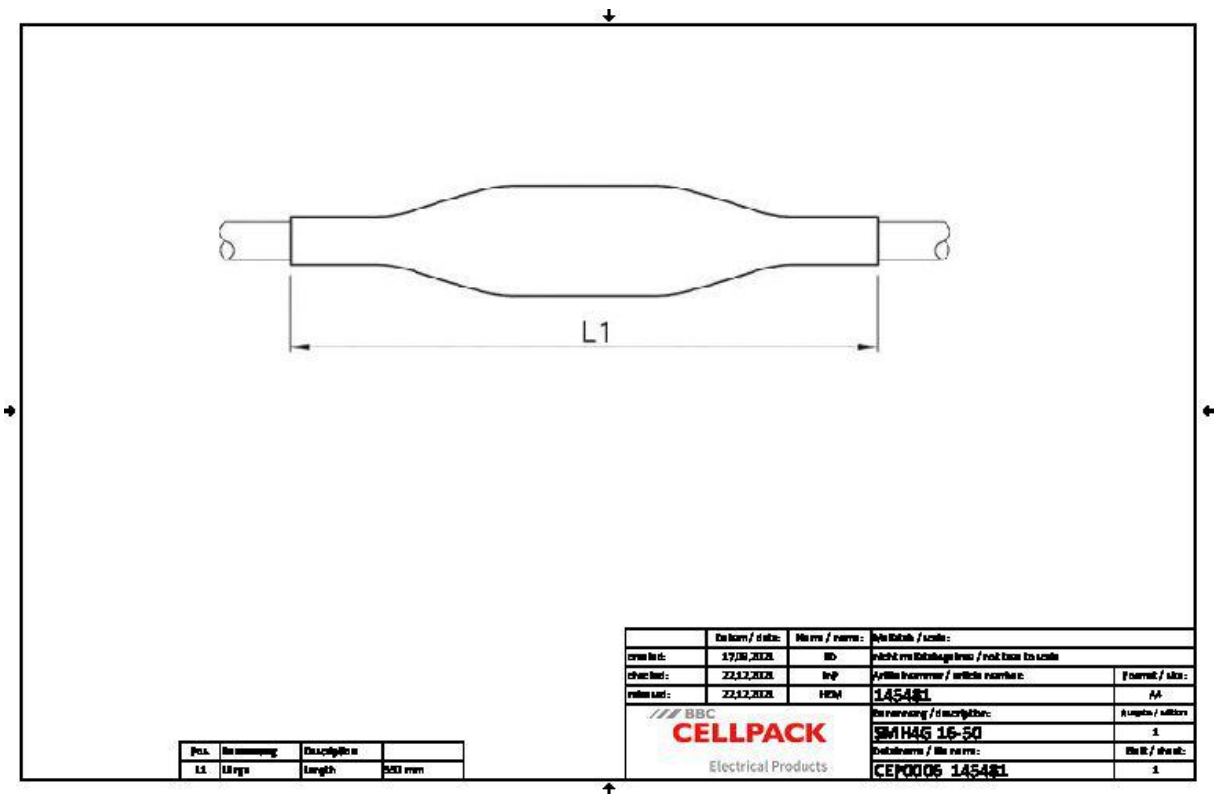

Article name	SMH4G 16-50
Article number	145481
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	550 mm
Nominal cross section Polymeric cable unarmoured per conductor 4x min	16 mm²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	50 mm²

Logistics data

Article name	SMH4G 16-50
Article number	145481
Delivery scope	Outer sleeve
	Inner sleeves
	Filling material
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311004242

Packaging data

Alternative unit of measure	Bag1	Pal. OW
Base quantity	1	100
Base unit of measure	Piece	Piece
Length (mm)	676	1200
Width (mm)	215	800
Height (mm)	92	770
Net weight (kg)	0.363	36.3
Gross weight (kg)	0.363	54.5