

Heat shrinkable straight-through joint
for flexible cables

Universally suitable for connecting conductors insulated with EPR (e.g. A07RN-F, H07RN-F).
Suitable for compression connectors.




Product description

Article name	SMH5G 10-25
Article number	145484

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

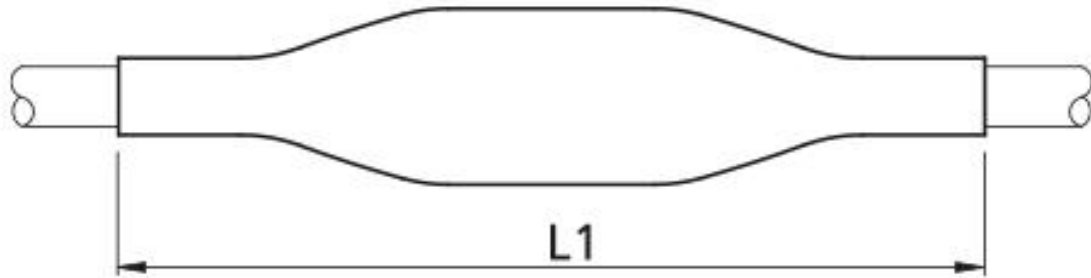

Article name	SMH5G 10-25
Article number	145484
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	600 mm
Nominal cross section Polymeric cable unarmoured per conductor 5x min	10 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 5x max	25 mm ²

Logistics data

Article name	SMH5G 10-25
Article number	145484
Delivery scope	Outer sleeve
	Inner sleeves
	Filling material
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311004273

Packaging data

Packaging type	Bag1	Carton
Content quantity	1	40
Unit of measure	Piece	Piece
Lenght (mm)	612	815
Width (mm)	227	610
Height (mm)	62	520
Net weight (kg)	0.304	12.16
Gross weight (kg)	0.304	12.46