

## Heat shrinkable straight-through joint

for flexible cables

Universally suitable for connecting conductors insulated with EPR (e.g. A07RN-F, H07RN-F). Suitable for compression connectors.




### Product description

Article name	SMH5G 16-50
Article number	163952

Characteristics	Applications
Compact dimensions	Indoor
Wide conductor and cross-section range	Outdoor
Resistant to chemical agents	Underground
Resistant to alkaline earth elements	Water
Stabilized against UV rays	Installation ducts
Free from paint-wetting inhibiting substances	Ductwork
Halogen-free	
Transversely waterproof	
High electrical insulating values	
High mechanical strength	

Technical data

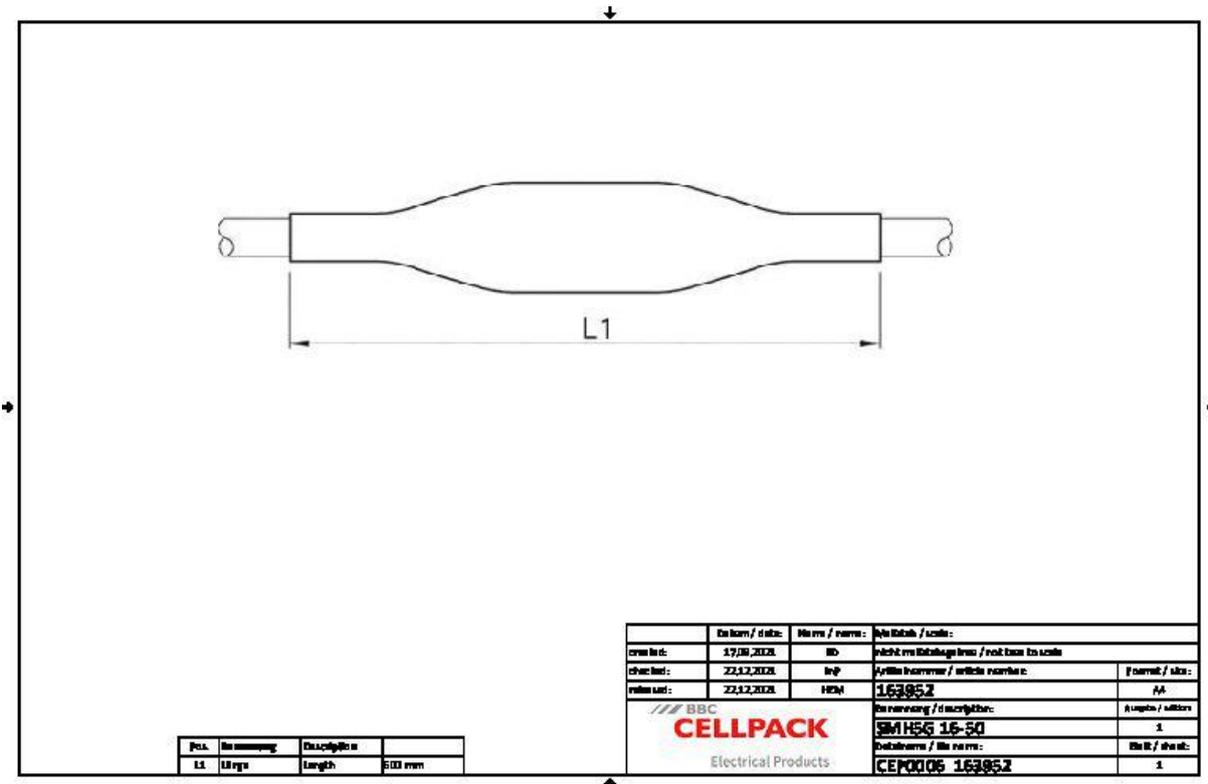

Article name	SMH5G 16-50
Article number	163952
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	600 mm
Nominal cross section Polymeric cable unarmoured per conductor 5x min	16 mm <sup>2</sup>
Nominal cross section Polymeric cable unarmoured per conductor 5x max	50 mm <sup>2</sup>

## Logistics data

Article name	SMH5G 16-50
Article number	163952
Delivery scope	Outer sleeve
	Inner sleeves
	Filling material
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311029955

## Packaging data

Alternative unit of measure	Bag1	Pal. OW
Base quantity	1	50
Base unit of measure	Piece	Piece
Length (mm)	662	1200
Width (mm)	206	800
Height (mm)	80	770
Net weight (kg)	0.498	24.9
Gross weight (kg)	0.498	43.1