

Heat shrinkable straight-through joint

for flexible cables

Universally suitable for connecting conductors insulated with EPR (e.g. A07RN-F, H07RN-F). Suitable for compression connectors.




Product description

Article name	SMH5G 70-120
Article number	205102

Characteristics	Applications
Compact dimensions	Indoor
Wide conductor and cross-section range	Outdoor
Resistant to chemical agents	Underground
Resistant to alkaline earth elements	Water
Stabilized against UV rays	Installation ducts
Free from paint-wetting inhibiting substances	Ductwork
Halogen-free	
Transversely waterproof	
High electrical insulating values	
High mechanical strength	

Technical data

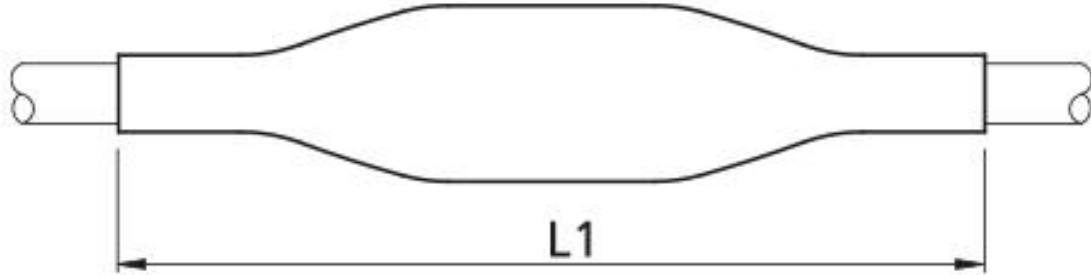

Article name	SMH5G 70-120
Article number	205102
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	700 mm
Nominal cross section Polymeric conductor unarmoured per conductor 4x min	70 mm ²
Nominal cross section Polymeric conductor unarmoured per conductor 4x max	120 mm ²

Logistics data

Article name	SMH5G 70-120
Article number	205102
Delivery scope	Outer sleeve
	Inner sleeves
	Filling material
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311118789

Packaging data

Packaging type	Bag1
Content quantity	1
Unit of measure	Piece
Length (mm)	729
Width (mm)	190
Height (mm)	140
Net weight (kg)	1.018
Gross weight (kg)	1.018