

Heat shrinkable straight-through joint  
for unarmoured polymeric cables

Universally suitable for connecting polymeric cables or conductors insulated with PVC, PE and XLPE (e.g. N(A)YY, NYM, TT). Suitable for compression connectors on aluminium or copper cables.




Product description

Article name	SMH1 10-25
Article number	150154
Optional accessory	Compression connectors (see Connecting technology)

Characteristics	Applications
Compact dimensions	Indoor
Wide conductor and cross-section range	Outdoor
Resistant to chemical agents	Underground
Resistant to alkaline earth elements	Water
Stabilized against UV rays	Installation ducts
Free from paint-wetting inhibiting substances	Ductwork
Halogen-free	
Transversely waterproof	
High electrical insulating values	
High mechanical strength	

## Technical data

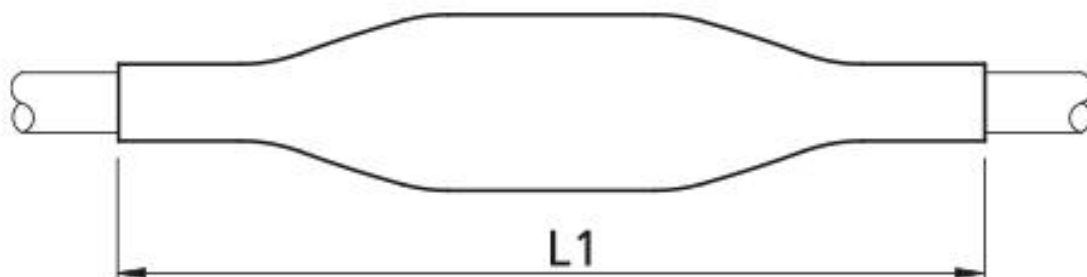

Article name	SMH1 10-25
Article number	150154
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	300 mm
Nominal cross section Polymeric cable unarmoured per conductor 1x min	10 mm <sup>2</sup>
Nominal cross section Polymeric cable unarmoured per conductor 1x max	25 mm <sup>2</sup>

## Logistics data

Article name	SMH1 10-25
Article number	150154
Delivery scope	Outer sleeve
	Inner sleeves
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311028569

## Packaging data

Packaging type	Bag1	Carton
Content quantity	1	20
Unit of measure	Piece	Piece
Lenght (mm)	320	425
Width (mm)	100	255
Height (mm)	25	160
Net weight (kg)	0.11	2.2
Gross weight (kg)	0.113	2.5