

Heat shrinkable straight-through joint

for unarmoured polymeric cables

Universally suitable for connecting polymeric cables or conductors insulated with PVC, PE and XLPE (e.g. N(A)YY, NYM, TT). Suitable for compression connectors on aluminium or copper cables.




Product description

Article name	SMH1 95-240
Article number	150160
Optional accessory	Compression connectors (see Connecting technology)

Characteristics	Applications
Compact dimensions	Indoor
Wide conductor and cross-section range	Outdoor
Resistant to chemical agents	Underground
Resistant to alkaline earth elements	Water
Stabilized against UV rays	Installation ducts
Free from paint-wetting inhibiting substances	Ductwork
Halogen-free	
Transversely waterproof	
High electrical insulating values	
High mechanical strength	

Technical data

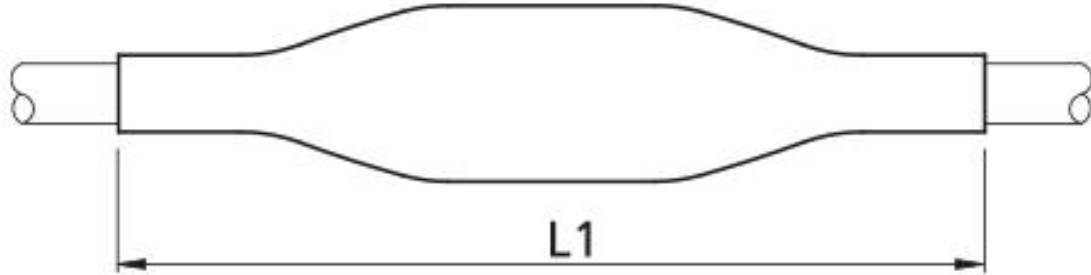

Article name	SMH1 95-240
Article number	150160
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	500 mm
Nominal cross section Polymeric cable unarmoured per conductor 1x min	95 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 1x max	240 mm ²

Logistics data

Article name	SMH1 95-240
Article number	150160
Delivery scope	Outer sleeve
	Inner sleeves
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311028583

Packaging data

Packaging type	Bag1	Pal. OW
Content quantity	1	250
Unit of measure	Piece	Piece
Length (mm)	543	1200
Width (mm)	201	800
Height (mm)	47	1130
Net weight (kg)	0.265	66.25
Gross weight (kg)	0.265	84.45