

Heat shrinkable transition joint
with solderless earthing wire connection

Universally suitable for transition from mass-impregnated paper cables to polymeric-insulated cables made of PVC, PE and XLPE, e.g. N(A)KBA on N(A)YY. Suitable for compression connectors on aluminium or copper cables.




Product description

Article name	SMH4 150-300 Pb-RF
Article number	150826
Notes	Use only connectors with separator.
Optional accessory	Compression connectors (see Connecting technology)

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

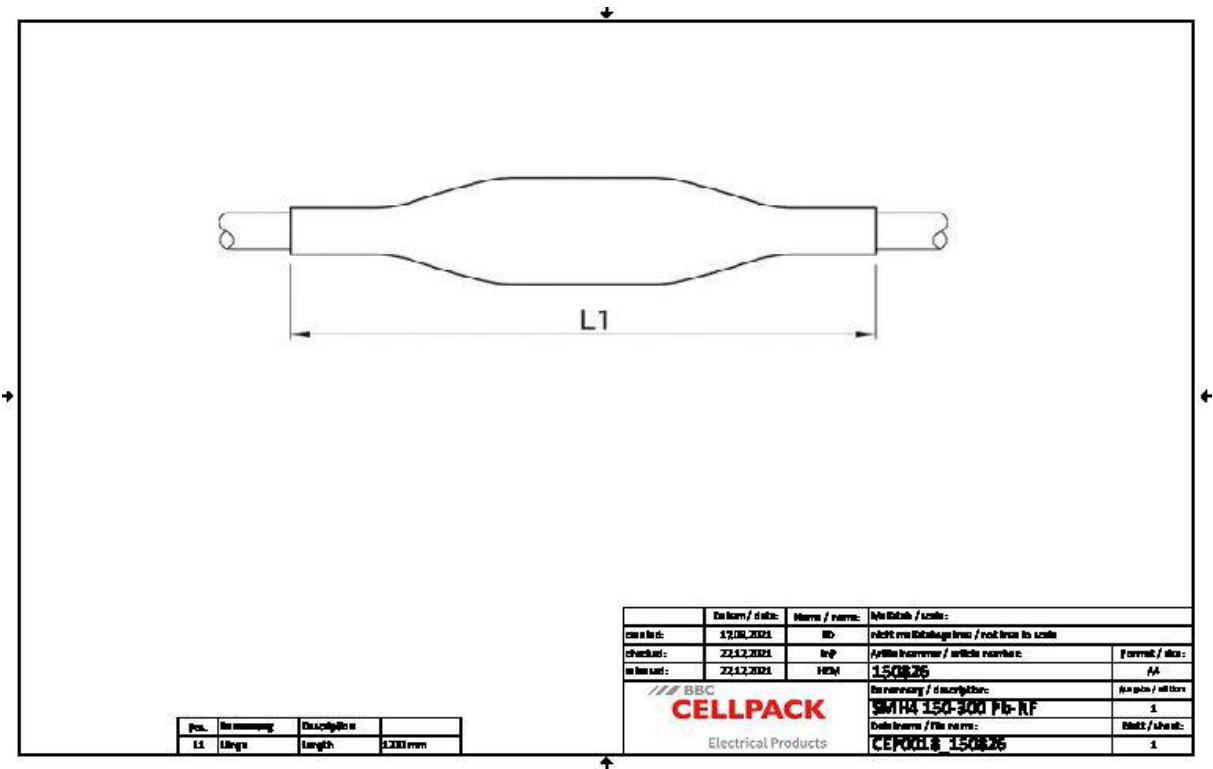

Article name	SMH4 150-300 Pb-RF
Article number	150826
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	1200 mm
Nominal cross section Polymeric cable unarmoured per conductor 4x min	150 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	300 mm ²
Nominal cross section Mass-impregnated paper cable per conductor 4x min	150 mm ²
Nominal cross section Mass-impregnated paper cable per conductor 4x max	300 mm ²

Logistics data

Article name	SMH4 150-300 Pb-RF
Article number	150826
Delivery scope	Outer sleeve
	Inner sleeves
	Core insulating tubes
	Earthing wire
	Pressure spring
	Spreader cap
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311026244

Packaging data

Alternative unit of measure	Bag1
Base quantity	1
Base unit of measure	Piece
Length (mm)	1230
Width (mm)	165
Height (mm)	95
Net weight (kg)	1.896
Gross weight (kg)	1.896