

Heat shrinkable straight-through joint

for polymeric cables with concentric conductor

Universally suitable for connecting polymeric-insulated cables and conductors with concentric conductors and insulations made of PVC, PE and XLPE (e.g. N(A)YCY, N(A)YC(W)Y, GKN). Suitable for compression connectors.




Product description

Article name	SMHC4 16-35
Article number	203029
Notes	With additional inner tube
Optional accessory	Compression connectors (see Connecting technology)

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

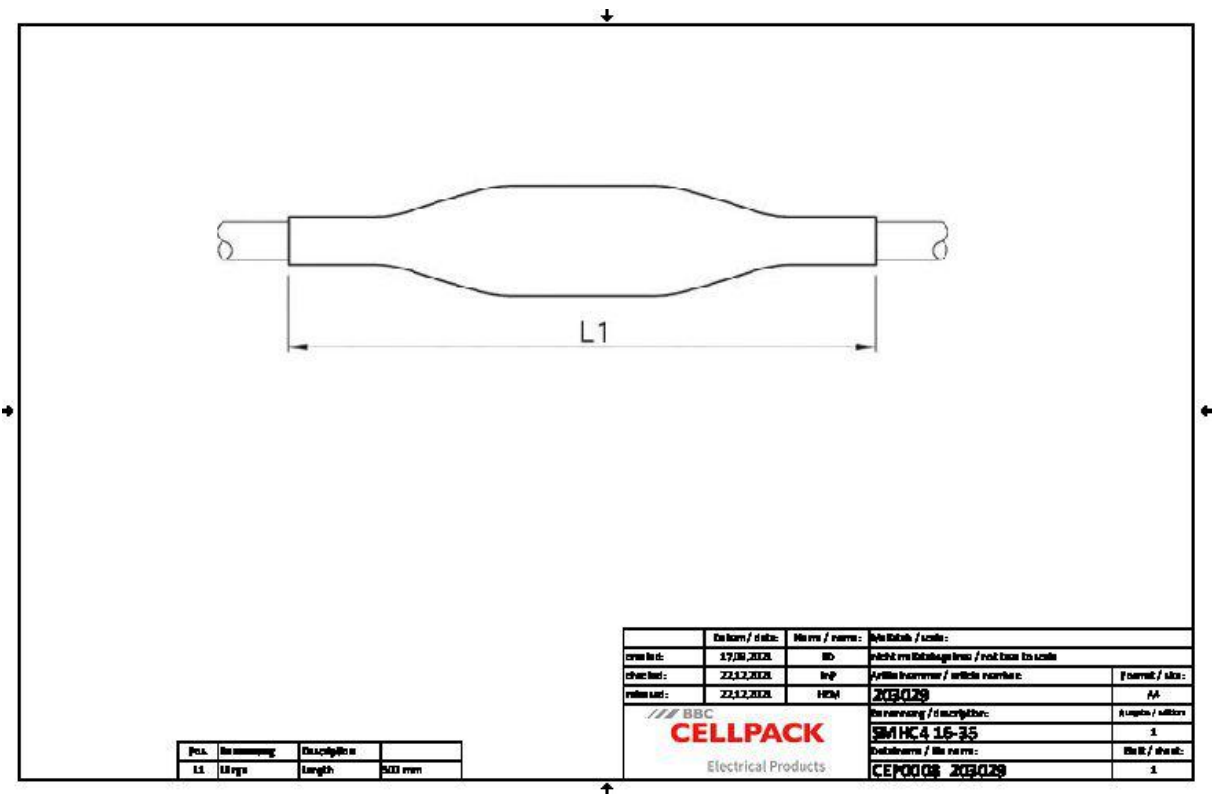

Article name	SMHC4 16-35
Article number	203029
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Article notes	With additional inner tube
Length L1	500 mm
Nominal cross section Polymeric cable with concentric conductor per conductor 4x min	16 mm²
Nominal cross section Polymeric cable with concentric conductor per conductor 4x max	35 mm²

Logistics data

Article name	SMHC4 16-35
Article number	203029
Delivery scope	Outer sleeve
	Inner sleeves
	Copper braid tape
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311115184

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	10
Base unit of measure	Piece	Piece
Length (mm)	530	585
Width (mm)	180	390
Height (mm)	77	330
Net weight (kg)	0.448	4.48
Gross weight (kg)	0.448	4.78