

Heat shrinkable straight-through joint
with screw connectors for unarmoured polymeric cables and conductors

Universally suitable for connecting polymeric cables or conductors insulated with PVC, PE and XLPE (e.g. N(A)YY, NYM, TT). With mechanical connectors with shear head bolts, suitable for aluminium or copper cables.




Product description

Article name	SMHSV4 50-150
Article number	262699

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

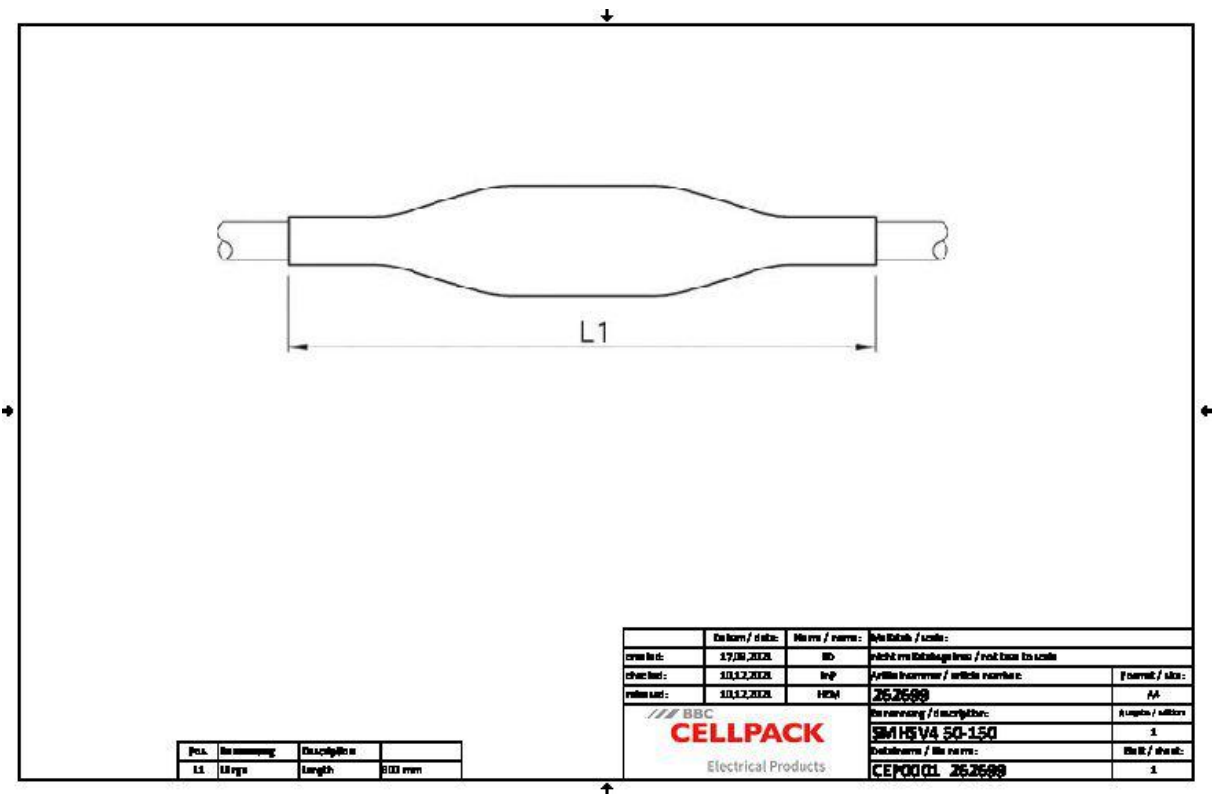

Article name	SMHSV4 50-150
Article number	262699
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	800 mm
Nominal cross section Polymeric cable unarmoured per conductor 4x min	50 mm²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	150 mm²

Logistics data

Article name	SMHSV4 50-150
Article number	262699
Delivery scope	Outer sleeve
	Inner sleeves
	Screw connectors with shear head bolts
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311143088

Packaging data

Alternative unit of measure	Bag1	Pal. OW
Base quantity	1	60
Base unit of measure	Piece	Piece
Length (mm)	993	1200
Width (mm)	173	800
Height (mm)	110	1100
Net weight (kg)	1.148	68.88
Gross weight (kg)	1.148	87.08