

Heat shrinkable straight-through joint  
with screw connectors for unarmoured polymeric cables and conductors

Universally suitable for connecting polymeric cables or conductors insulated with PVC, PE and XLPE (e.g. N(A)YY, NYM, TT). With mechanical connectors with shear head bolts, suitable for aluminium or copper cables.




Product description

Article name	SMHSV5 6-50
Article number	357683

Characteristics
Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

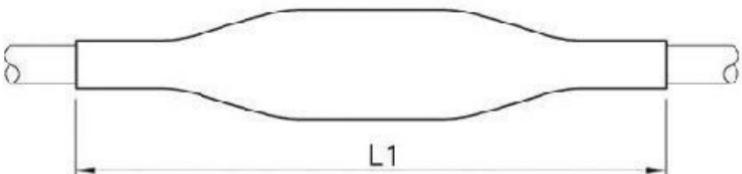

Pos.	Description	Dimensions	
L1	Length	mm	

Date / date:	Name / name:	Site / site:
17/01/2020	BD	Site / site:
10/12/2020	BD	Site / site:
10/12/2020	BD	Site / site:

/// BBC

CELLPACK

Electrical Products

Description / description:	Quantity / quantity:
SMHSV5 6-50	1
CEP0001 357643	1

Article name	SMHSV5 6-50
Article number	357683
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	800 mm
Nominal cross section Polymeric cable unarmoured per conductor 5x min	6 mm²
Nominal cross section Polymeric cable unarmoured per conductor 5x max	50 mm²

## Logistics data

Article name	SMHSV5 6-50
Article number	357683
Delivery scope	Outer sleeve
	Inner sleeves
	Screw connectors with shear head bolts
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311172613

## Packaging data

Alternative unit of measure	Bag1	Pal. EU
Base quantity	1	100
Base unit of measure	Piece	Piece
Length (mm)	835	1200
Width (mm)	203	800
Height (mm)	77	1130
Net weight (kg)	0.592	59.2
Gross weight (kg)	0.592	88.2