

Heat shrinkable straight-through joint  
with crimp connectors for control cables and signal cables

Universally suitable for connecting polymeric cables or conductors insulated with PVC, PE and XLPE (e.g. N(A)YY, NYM, TT). Suitable for compression connectors on aluminium or copper cables.




Product description

Article name	SMH 18/24 1.5-2.5
Article number	145493

Characteristics
Compact dimensions
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Transversely waterproof
High electrical insulating values
High mechanical strength

Applications
Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

## Technical data

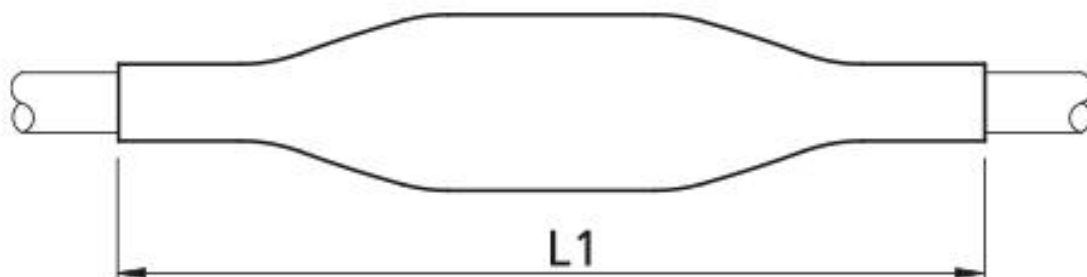

Article name	SMH 18/24 1.5-2.5
Article number	145493
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	500 mm
Control and signal cable Number of conductors min	18 Pieces
Control and signal cable Number of conductors max	24 Pieces
Nominal cross section Control and signal cable per conductor min	1.5 mm <sup>2</sup>
Nominal cross section Control and signal cable per conductor max	2.5 mm <sup>2</sup>

## Logistics data

Article name	SMH 18/24 1.5-2.5
Article number	145493
Delivery scope	Outer sleeve
	Inner sleeves
	Heat shrinkable crimp connectors
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311005355

## Packaging data

Packaging type	Carton
Content quantity	1
Unit of measure	Piece
Length (mm)	720
Width (mm)	155
Height (mm)	139
Net weight (kg)	0.254
Gross weight (kg)	0.254