

Heat shrinkable universal straight-through joint
with screw connectors for cables with concentric conductor

Universally suitable for connecting polymeric-insulated cables and conductors with concentric conductors and insulations made of PVC, PE and XLPE, e.g. GKN and GN-CLN.




Product description

| | |
|----------------|------------|
| Article name | SMSV 16-95 |
| Article number | 335143 |

| |
|---|
| Characteristics |
| Compact dimensions |
| Wide conductor and cross-section range |
| Resistant to chemical agents |
| Resistant to alkaline earth elements |
| Stabilized against UV rays |
| Free from paint-wetting inhibiting substances |
| Halogen-free |
| Transversely waterproof |
| High electrical insulating values |
| High mechanical strength |
| Ready for immediate operation |

| |
|--------------------|
| Applications |
| Indoor |
| Outdoor |
| Underground |
| Water |
| Installation ducts |
| Ductwork |

Technical data

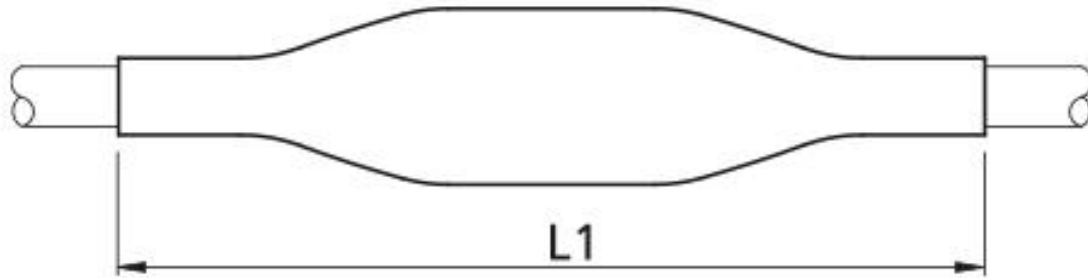

| | |
|--|--------------------------|
| Article name | SMSV 16-95 |
| Article number | 335143 |
| Voltage levels | U0/U (Um) 0,6/1 (1,2) kV |
| Test standards | EN 50393 |
| Length L1 | 750 mm |
| Nominal cross section Polymeric cable with concentric conductor per conductor 3x min | 16 mm ² |
| Nominal cross section Polymeric cable with concentric conductor per conductor 3x max | 95 mm ² |

Logistics data

| | |
|------------------------|--|
| Article name | SMSV 16-95 |
| Article number | 335143 |
| Delivery scope | Outer sleeve |
| | Inner sleeves |
| | Inner protective sleeve (belt sleeve) |
| | Copper braid tape |
| | Screw connectors with shear head bolts |
| | Cleaning tissue |
| | Emery cloth |
| | Assembly instructions |
| Shelf life description | Unlimited shelf life |
| Country of origin | Germany |
| Customs tariff number | 39173900 |
| EAN/GTIN | 4010311164816 |

Packaging data

| | | |
|-------------------|-------|--------|
| Packaging type | Bag1 | Carton |
| Content quantity | 1 | 70 |
| Unit of measure | Piece | Piece |
| Length (mm) | 662 | 1100 |
| Width (mm) | 207 | 330 |
| Height (mm) | 92 | 330 |
| Net weight (kg) | 0.859 | 60.13 |
| Gross weight (kg) | 0.859 | 60.43 |