

Heat shrinkable universal straight-through joint

with screw connectors for cables with concentric conductor

Universally suitable for connecting polymeric-insulated cables and conductors with concentric conductors and insulations made of PVC, PE and XLPE, e.g. GKN and GN-CLN.



Product description

Article name	SMSV 95-240
Article number	335144


Characteristics

Compact dimensions
Wide conductor and cross-section range
Resistant to chemical agents
Resistant to alkaline earth elements
Stabilized against UV rays
Free from paint-wetting inhibiting substances
Halogen-free
Transversely waterproof
High electrical insulating values
High mechanical strength
Ready for immediate operation

Applications

Indoor
Outdoor
Underground
Water
Installation ducts
Ductwork

Technical data

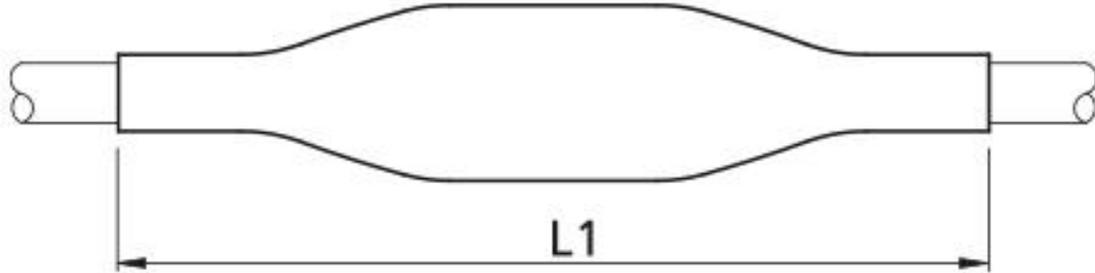

Article name	SMSV 95-240
Article number	335144
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L1	1000 mm
Nominal cross section Polymeric cable with concentric conductor per conductor 3x min	95 mm ²
Nominal cross section Polymeric cable with concentric conductor per conductor 3x max	240 mm ²

Logistics data

Article name	SMSV 95-240
Article number	335144
Delivery scope	Outer sleeve
	Inner sleeves
	Inner protective sleeve (belt sleeve)
	Copper braid tape
	Screw connectors with shear head bolts
	Cleaning tissue
	Emery cloth
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	39173900
EAN/GTIN	4010311164823

Packaging data

Packaging type	Bag1	Carton
Content quantity	1	70
Unit of measure	Piece	Piece
Length (mm)	633	1100
Width (mm)	100	330
Height (mm)	60	330
Net weight (kg)	0.262	18.34
Gross weight (kg)	0.262	18.64