


## Cast resin branch joint

for polymeric cables

Universally suitable for branching polymeric cables or conductors insulated with PVC, PE, XLPE and EPR (e.g. N(A)YY, NYM, TT) with or without concentric conductor. With hydrolysis resistance PUR cast resin EG. Suitable for branch clamps on copper and aluminium conductors.

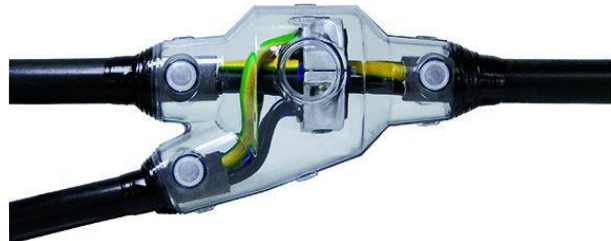

### Product description

Article name	Y 00 EG
Article number	133841
Notes	REACH Regulation on the restriction of diisocyanates (for EU countries only)The European Commission amended Annex XVII of the REACH Regulation (EC) (new number 74) with Regulation (EU) 2020/1149, which entered into force on 24 August 2020. In accordance with the new REACH Regulation, appropriate training will be required prior to the industrial or professional use of diisocyanates, adhesives and sealants as of 24 August 2023. All information regarding training materials and training courses is available on the ISOPA/ALIPA website <a href="https://www.safeusediisocyanates.eu/">https://www.safeusediisocyanates.eu/</a>
Optional accessory	Branch clamp HE 1/70/150 (see Connecting technology)
	Screw branch clamp AK (see Connecting technology)
	Cleaner UNIVERSAL CLEANER 121 (see Accessories)
	Branch clamp KP (see Connecting technology)
	Split bolt clamp FK (see Connecting technology)


#### Characteristics

Compact dimensions
High-quality transparent shockproof plastic shell
Resistant to chemical agents
Stabilized against UV rays
Resistant to alkaline earth elements
Longitudinally and transversely watertight
High electrical insulating values
High mechanical strength
Ready for immediate operation
Quick, safe and easy assembly
Large filler aperture to facilitate casting

#### Applications

Indoor
Outdoor
Underground
Water
Installation ducts

## Technical data

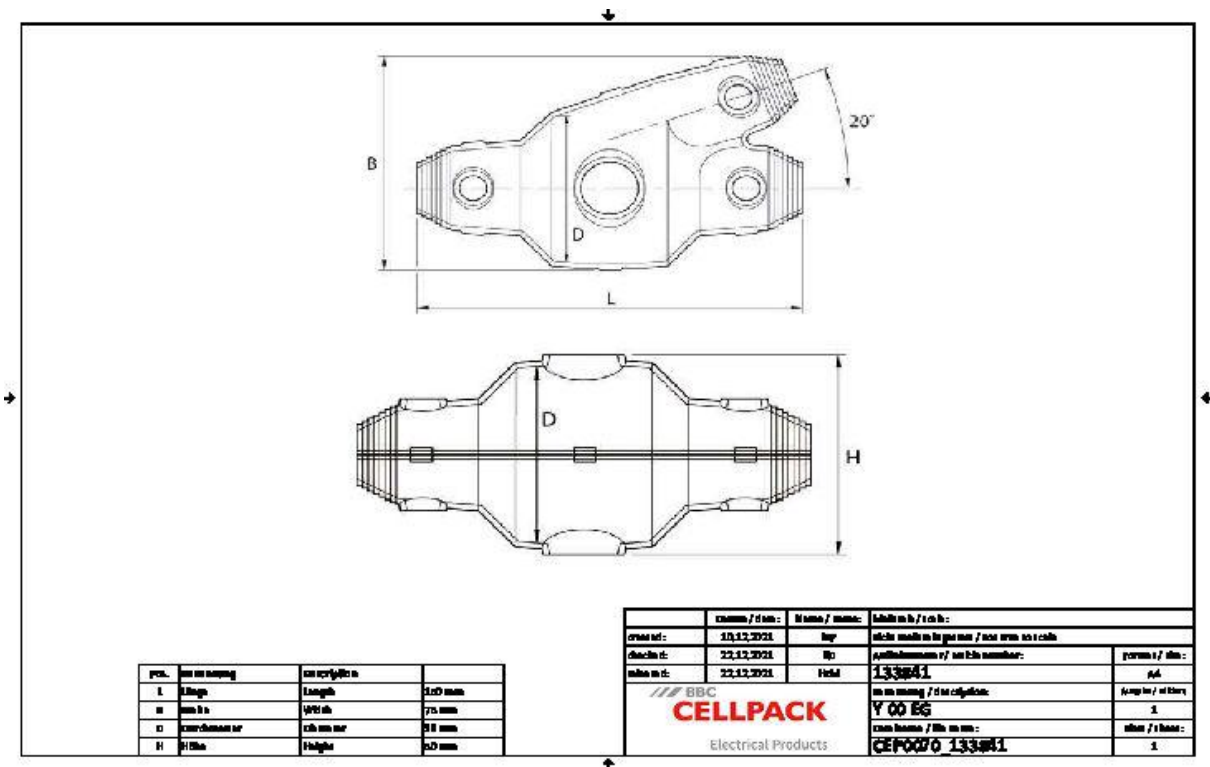

Article name	Y 00 EG
Article number	133841
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
Length L	150 mm
Width B	75 mm
Height H	50 mm
Diameter D	38 mm
Diameter cable Main cable max	19 mm
Diameter cable Branch cable max	19 mm
Nominal cross section Main cable Polymeric cable unarmoured per conductor 3x max	4 mm <sup>2</sup>
Nominal cross section Branch cable Polymeric cable unarmoured per conductor 3x max	2.5 mm <sup>2</sup>
Nominal cross section Main cable Polymeric cable unarmoured per conductor 4x max	4 mm <sup>2</sup>
Nominal cross section Branch cable Polymeric cable unarmoured per conductor 4x max	2.5 mm <sup>2</sup>
Nominal cross section Main cable Polymeric cable unarmoured per conductor 5x max	4 mm <sup>2</sup>
Nominal cross section Branch cable Polymeric cable unarmoured per conductor 5x max	2.5 mm <sup>2</sup>

## Logistics data

Article name	Y 00 EG
Article number	133841
Delivery scope	Fill and air-release funnel
	Hydrolysis resistance PUR cast resin EG
	Packed in practical and easy-to-use two-chamber bags
	Transparent plastic shell
	PVC insulation tape
	Protective gloves
	Closing stops
	Assembly instructions
Shelf life	40 Month
Country of origin	Germany
Customs tariff number	39095090
EAN/GTIN	4010311053868

## Packaging data

Alternative unit of measure	Case	Pal. EU
Base quantity	1	480
Base unit of measure	Piece	Piece
Lenght (mm)	208	1200
Width (mm)	154	800
Height (mm)	47	1130
Net weight (kg)	0.345	165.6
Gross weight (kg)	0.345	194.6