

Cast resin branch joint

for polymeric cables

Suitable for branching the 1-core cables or conductors, e.g. wires for cathodic corrosion protection from chemical and electrochemical reactions in underground area and under water. Pipes, warehouse containers, electric supply lines and other metal constructions are economically and effectively protected against passive corrosion. With hydrolysis resistance PUR cast resin EG. Suitable for branch clamps on copper and aluminium conductors.




Product description

| | |
|--------------------|---|
| Article name | YCP |
| Article number | 124683 |
| Notes | REACH Regulation on the restriction of diisocyanates (for EU countries only)The European Commission amended Annex XVII of the REACH Regulation (EC) (new number 74) with Regulation (EU) 2020/1149, which entered into force on 24 August 2020. In accordance with the new REACH Regulation, appropriate training will be required prior to the industrial or professional use of diisocyanates, adhesives and sealants as of 24 August 2023. All information regarding training materials and training courses is available on the ISOPA/ALIPA website https://www.safeusediisocyanates.eu/ |
| Optional accessory | Screw branch clamp AK (see Connecting technology) Cleaner UNIVERSAL CLEANER 121 (see Accessories) Split bolt clamp FK (see Connecting technology) |

| Characteristics |
|---|
| Compact dimensions |
| High-quality transparent shockproof plastic shell |
| Resistant to chemical agents |
| Stabilized against UV rays |
| Resistant to alkaline earth elements |
| Longitudinally and transversely watertight |
| High electrical insulating values |
| High mechanical strength |
| Ready for immediate operation |
| Quick, safe and easy assembly |
| Large filler aperture to facilitate casting |

| Applications |
|--------------------|
| Indoor |
| Outdoor |
| Underground |
| Water |
| Installation ducts |

Technical data

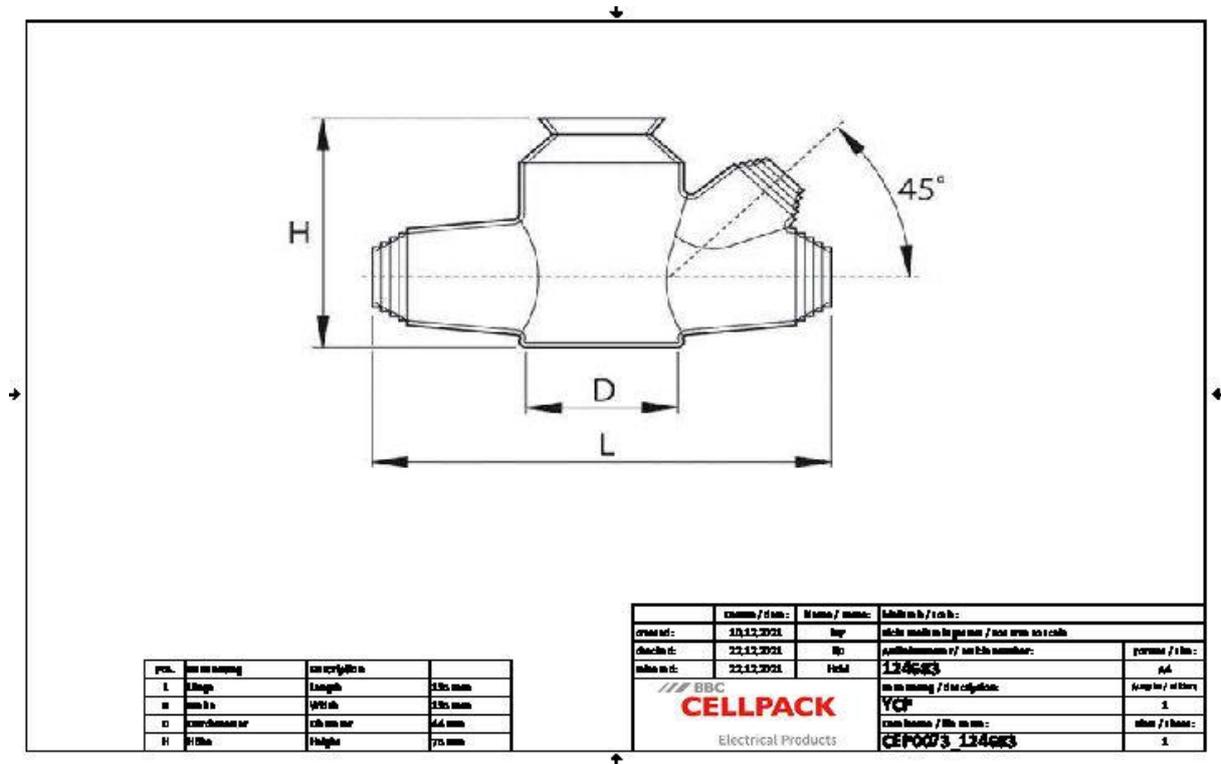

| | |
|--|--------------------------|
| Article name | YCP |
| Article number | 124683 |
| Voltage levels | U0/U (Um) 0,6/1 (1,2) kV |
| Test standards | EN 50393 |
| Length L | 135 mm |
| Width B | 48 mm |
| Height H | 75 mm |
| Diameter D | 44 mm |
| Diameter cable Main cable max | 23 mm |
| Diameter cable Branch cable max | 20 mm |
| Nominal cross section Main cable Polymeric cable unarmoured per conductor 1x min | 10 mm ² |
| Nominal cross section Main cable Polymeric cable unarmoured per conductor 1x max | 50 mm ² |
| Nominal cross section Branch cable Polymeric cable unarmoured per conductor 1x min | 4 mm ² |
| Nominal cross section Branch cable Polymeric cable unarmoured per conductor 1x max | 50 mm ² |

Logistics data

| | |
|-----------------------|--|
| Article name | YCP |
| Article number | 124683 |
| Delivery scope | Fill and air-release funnel |
| | Hydrolysis resistance PUR cast resin EG |
| | Packed in practical and easy-to-use two-chamber bags |
| | Transparent plastic shell |
| | PVC insulation tape |
| | Protective gloves |
| | Closing stops |
| | Assembly instructions |
| Shelf life | 40 Month |
| Country of origin | Germany |
| Customs tariff number | 39095090 |
| EAN/GTIN | 4010311003290 |

Packaging data

| Alternative unit of measure | Case | Pal. OW |
|-----------------------------|-------|---------|
| Base quantity | 1 | 480 |
| Base unit of measure | Piece | Piece |
| Length (mm) | 209 | 1200 |
| Width (mm) | 159 | 800 |
| Height (mm) | 47 | 1130 |
| Net weight (kg) | 0.586 | 281.28 |
| Gross weight (kg) | 0.586 | 299.48 |