

Compression cable lug Cu
for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




Product description

Article name	DK-CU-V 25/10
Article number	126051
Notes	To be used with suitable crimping tool with DIN inserts

Applications
Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295)

Technical data

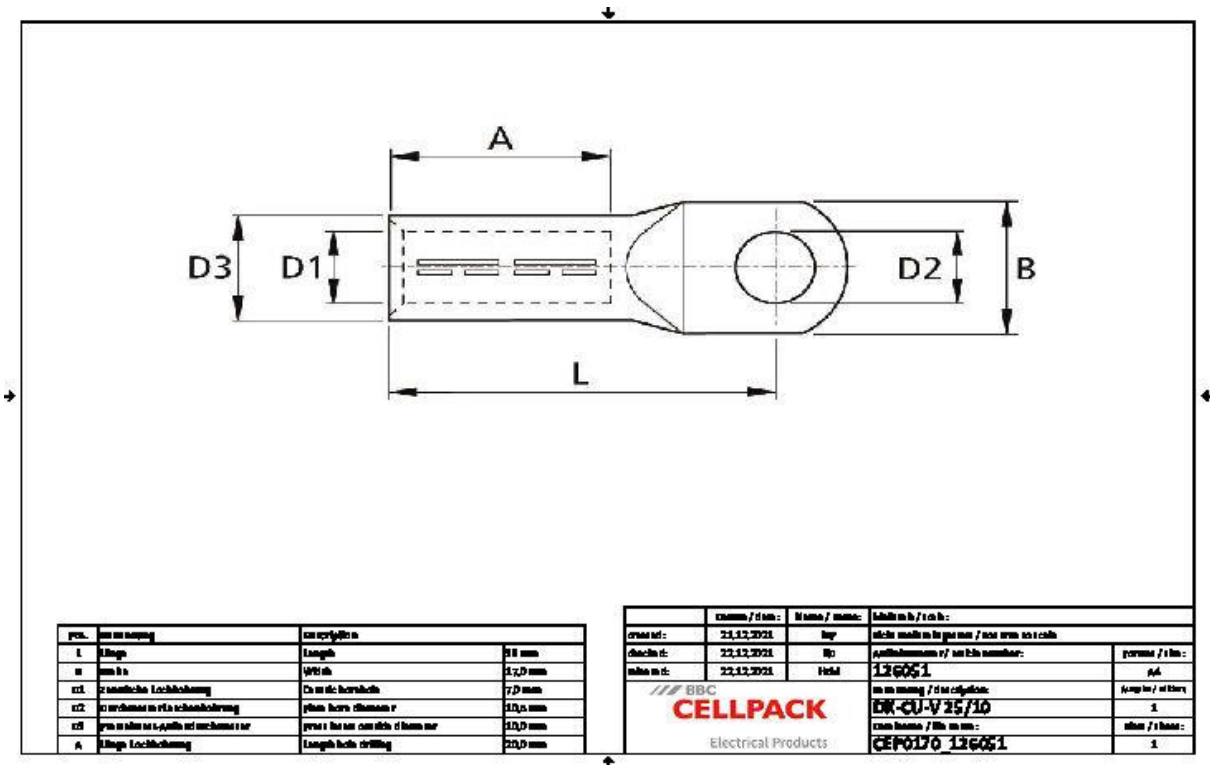

Article name	DK-CU-V 25/10
Article number	126051
Test standards	DIN 46235
	IEC 61238
Materials	Copper tin-plated
Length L	38 mm
Width B	17 mm
Diameter D1	7 mm
Diameter D2	10.5 mm
Diameter D3	10 mm
Nominal cross section min	25 mm ²
Press die code K	10 mm
Length A	20 mm

Logistics data

Article name	DK-CU-V 25/10
Article number	126051
Delivery scope	Compression cable lug
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311052434

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	100
Base unit of measure	Piece	Piece
Lenght (mm)	52	100
Width (mm)	13	105
Height (mm)	7	100
Net weight (kg)	0.016	1.6
Gross weight (kg)	0.016	1.9