


Heat shrinkable crimp connector  
insulated with heat shrinkable tube with adhesive

Durable and reliable connector for application in areas under extreme conditions. Hot melt adhesive completely seals the connection area.

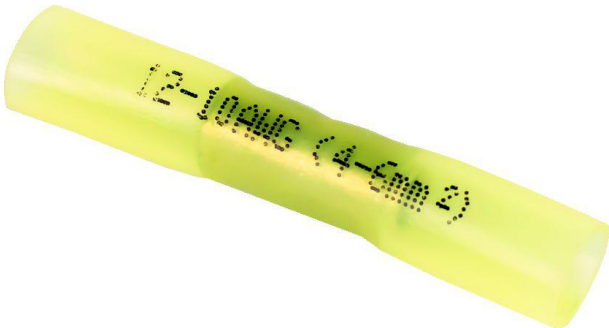

Product description

|                |   |
|----------------|---|
| Article name   | DR 3  |
| Article number | 456332  |
| Notes          | For a proper conductor/connector contact, use a suitable crimping tool. |

|                                |
|--------------------------------|
| Characteristics                |
| 100 % waterproof               |
| Superior electrical properties |
| High mechanical strength       |

|              |
|--------------|
| Applications |
| Indoor       |

## Technical data

|                                   |                                     |
|-----------------------------------|-------------------------------------|
| Article name                      | DR 3                                |
| Article number                    | 456332                              |
| Selection Note                    | 20 Heat shrinkable crimp connectors |
| Length L                          | 42 mm                               |
| Colours                           | yellow                              |
| Nominal cross section min         | 4 mm <sup>2</sup>                   |
| Nominal cross section max         | 6 mm <sup>2</sup>                   |
| Water absorption max              | 0.5 %                               |
| Voltage max                       | 600 V                               |
| Tensile strength                  | 10.4 MPa                            |
| Heat resistance (168 h at 175 °C) | No fracturing                       |
| Heat shock (4 h at 225 °C)        | No fracturing                       |
| Temperature range min             | -40 °C                              |
| Temperature range max             | 105 °C                              |
| Shrinkage temperature             | > 150 °C                            |
| Corrosion                         | none                                |

## Logistics data

|                       |                                     |
|-----------------------|-------------------------------------|
| Article name          | DR 3                                |
| Article number        | 456332                              |
| Delivery scope        | 20 Heat shrinkable crimp connectors |
| Country of origin     | China                               |
| Customs tariff number | 85369010                            |
| EAN/GTIN              | 4010311199559                       |

## Packaging data

|                             |       |        |
|-----------------------------|-------|--------|
| Alternative unit of measure | Bag   | Carton |
| Base quantity               | 20    | 1000   |
| Base unit of measure        | Piece | Piece  |
| Length (mm)                 | 145   | 510    |
| Width (mm)                  | 70    | 260    |
| Height (mm)                 | 17    | 235    |
| Net weight (kg)             | 0.04  | 2      |
| Gross weight (kg)           | 0.042 | 2.3    |