

1-core outdoor cable termination
with screw cable lugs for 1-core polymeric cables

Hybrid cable terminations CHESK-F are suitable for all 1-core polymeric-insulated cables (PVC, PE, XLPE, EPR) with different types of semi-conductive layers (graphitecoated, removable or strippable) and screen design (copper wire or tape). With screw cable lugs for main conductor and copper wire screen.



Product description

Article name	CHESK-F 12kV 630-1000
Article number	369504
Notes	Can be used also for cables $U_m = 7,2 \text{ kV}$, then the minimum diameter over conductor insulation has to be checked.
Optional accessory	EGA earthing kit for cables with tape screen (see Connecting technology)

Characteristics

Flexible silicone stress control elements ensure reliable stress control under all operating conditions

Combination of slip-on and heat shrinkable components

Wide cross-section range


Quick, safe and easy assembly

Ready for immediate operation

Applications

Outdoor

Technical data

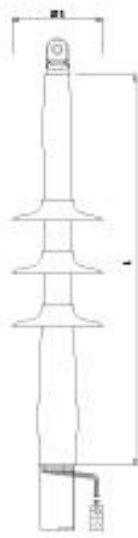

Article name	CHESK-F 12kV 630-1000
Article number	369504
Voltage levels	U0/U (Um) 6/10 (12) kV - 6,35/11 (12) kV
Test standards	CENELEC HD 629.1
Length L	310 mm
Diameter over core insulation after removal of the outer conductive layer min	36.8 mm
Number of sheds per phase	1 Pieces
Diameter shed	123 mm
Nominal cross section 12 kV min	630 mm ²
Nominal cross section 12 kV max	1000 mm ²

Logistics data

Article name	CHESK-F 12kV 630-1000
Article number	369504
Delivery scope	Heat shrinkable tube (tracking resistant)
	Silicone field control elements
	Silicone sheds
	Screw cable lugs
	1 Set for 3 phases
	Sealing tape
	Assembly material
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Germany
Customs tariff number	85469090
EAN/GTIN	4010311180076

Packaging data

Packaging type	Carton	Pal. OW
Content quantity	1	42
Unit of measure	Piece	Piece
Length (mm)	385	1200
Width (mm)	190	800
Height (mm)	134	1130
Net weight (kg)	6.164	258.888
Gross weight (kg)	6.164	277.088