

Compression cable lug Cu  
longitudinally sealed for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for outdoor cable terminations.




Product description

Article name	DK-CU-V-LD 95/12
Article number	126136
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Cable lug for copper conductor RM/SM (Class 2) and Classes 5 and 6 according DIN EN 60228 (VDE 0295)

## Technical data

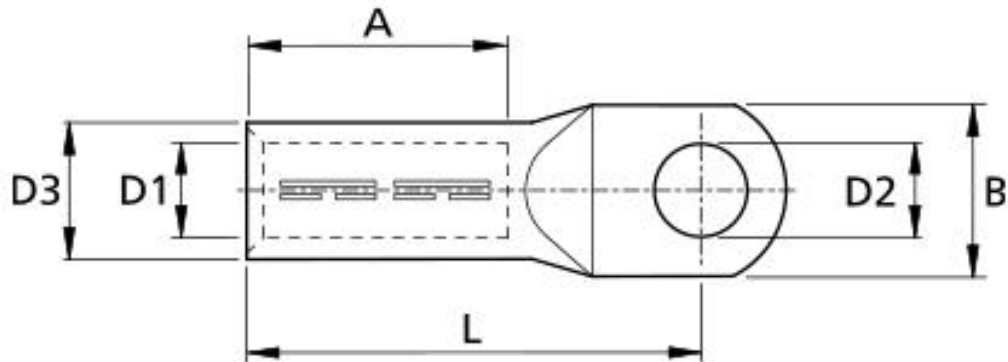

Article name	DK-CU-V-LD 95/12
Article number	126136
Test standards	DIN 46235
Materials	Copper tin-plated
Length L	65 mm
Width B	28 mm
Diameter D1	13.5 mm
Diameter D2	13 mm
Diameter D3	19 mm
Nominal cross section min	95 mm <sup>2</sup>
Press die code K	18 mm
Length A	35 mm

Logistics data

Article name	DK-CU-V-LD 95/12
Article number	126136
Delivery scope	Compression cable lug
Country of origin	Germany
Customs tariff number	85369010
EAN/GTIN	4010311052748

Packaging data

Packaging type	Bag1	Carton
Content quantity	1	50
Unit of measure	Piece	Piece
Lenght (mm)	78	190
Width (mm)	24	165
Height (mm)	17	75
Net weight (kg)	0.093	4.65
Gross weight (kg)	0.093	4.95