

Compression cable lug Cu

for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




Product description

Article name	DK-CU-V 16/12
Article number	126048
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295)

Technical data

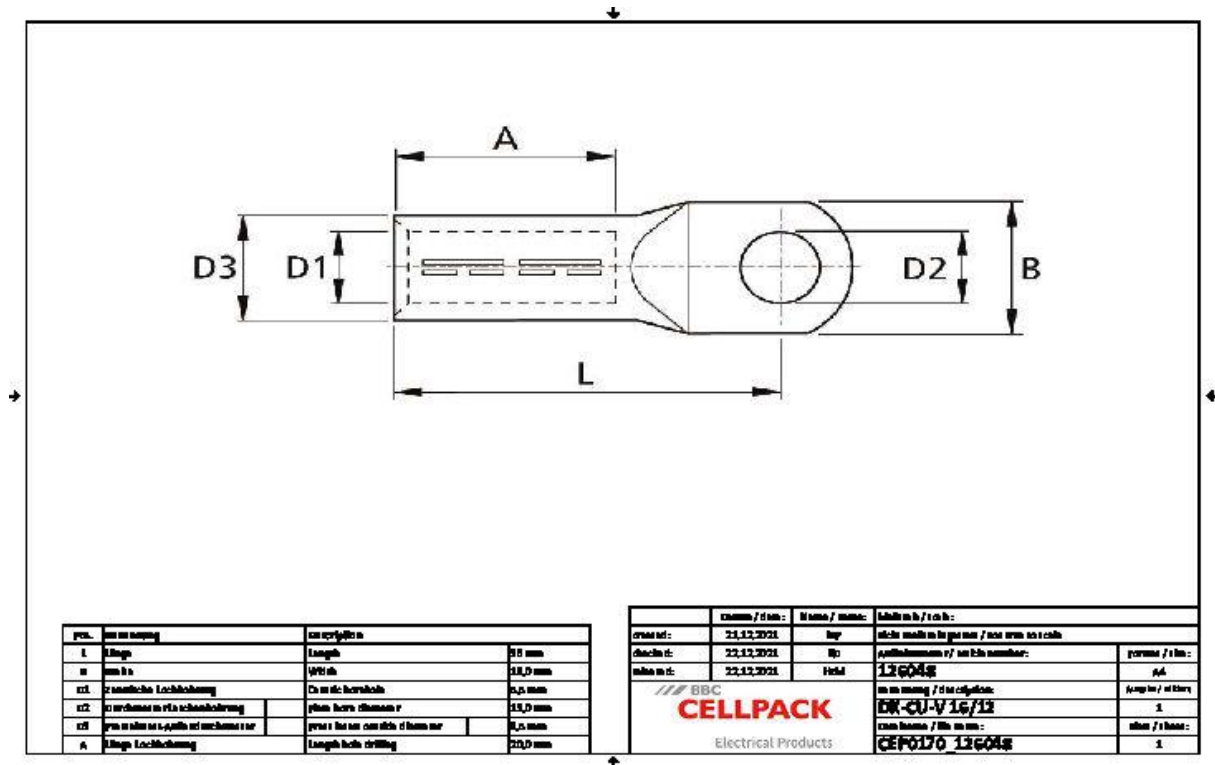

Article name	DK-CU-V 16/12
Article number	126048
Test standards	DIN 46235
	IEC 61238
Materials	Copper tin-plated
Length L	36 mm
Width B	18 mm
Diameter D1	5.5 mm
Diameter D2	13 mm
Diameter D3	8.5 mm
Nominal cross section min	16 mm ²
Press die code K	8 mm
Length A	20 mm

Logistics data

Article name	DK-CU-V 16/12
Article number	126048
Delivery scope	Compression cable lug
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311052427

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	100
Base unit of measure	Piece	Piece
Length (mm)	52	97
Width (mm)	15	97
Height (mm)	7	97
Net weight (kg)	0.013	1.3
Gross weight (kg)	0.013	1.6