

Compression cable lug Cu

for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




Product description

Article name	DK-CU-V 95/16
Article number	126072
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295)

Technical data

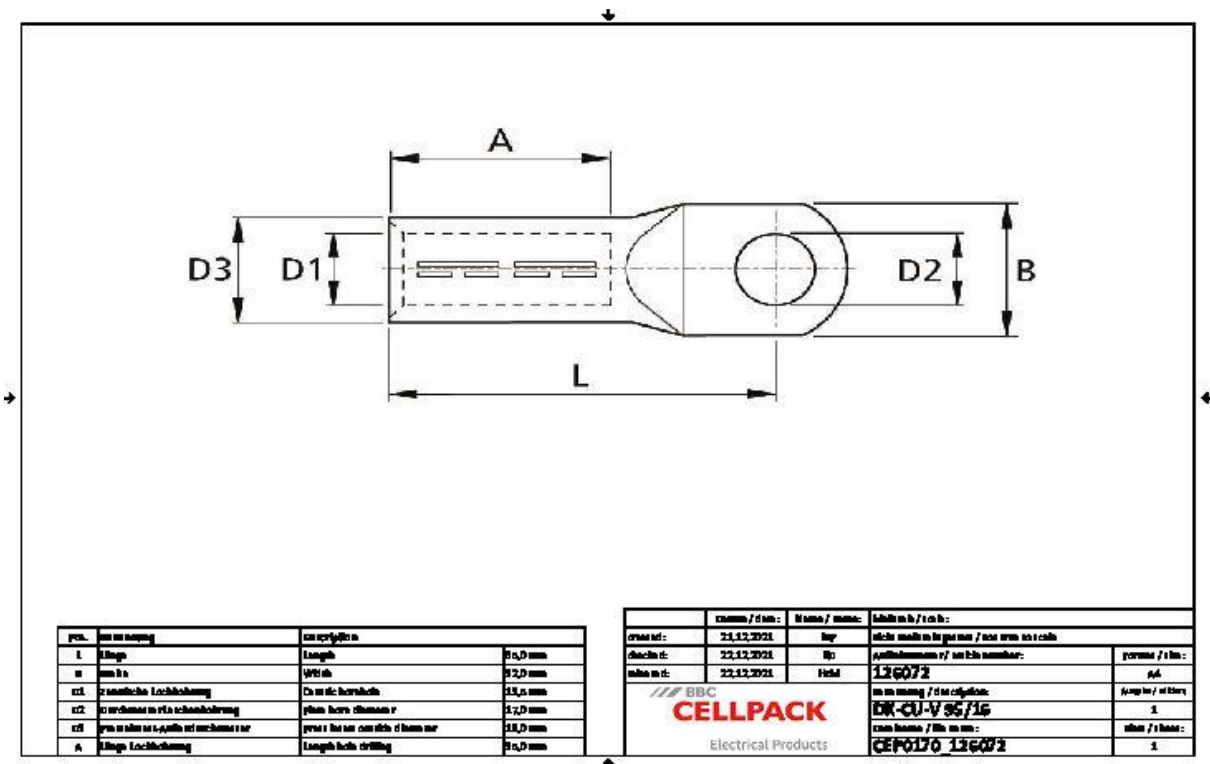

Article name	DK-CU-V 95/16
Article number	126072
Test standards	DIN 46235
	IEC 61238
Materials	Copper tin-plated
Length L	65 mm
Width B	32 mm
Diameter D1	13.5 mm
Diameter D2	17 mm
Diameter D3	19 mm
Nominal cross section min	95 mm ²
Press die code K	18 mm
Length A	35 mm

Logistics data

Article name	DK-CU-V 95/16
Article number	126072
Delivery scope	Compression cable lug
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311052526

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	50
Base unit of measure	Piece	Piece
Lenght (mm)	83	145
Width (mm)	26	145
Height (mm)	17	100
Net weight (kg)	0.089	4.45
Gross weight (kg)	0.089	4.75