

Compression cable lug Cu
for low and medium voltage

Cable lug (hexagonally compressed) for copper
conductors, suitable for indoor cable terminations.




Product description

Article name	DK-CU-V 150/12
Article number	126080
Notes	To be used with suitable crimping tool with DIN inserts

Applications
Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295)

Technical data

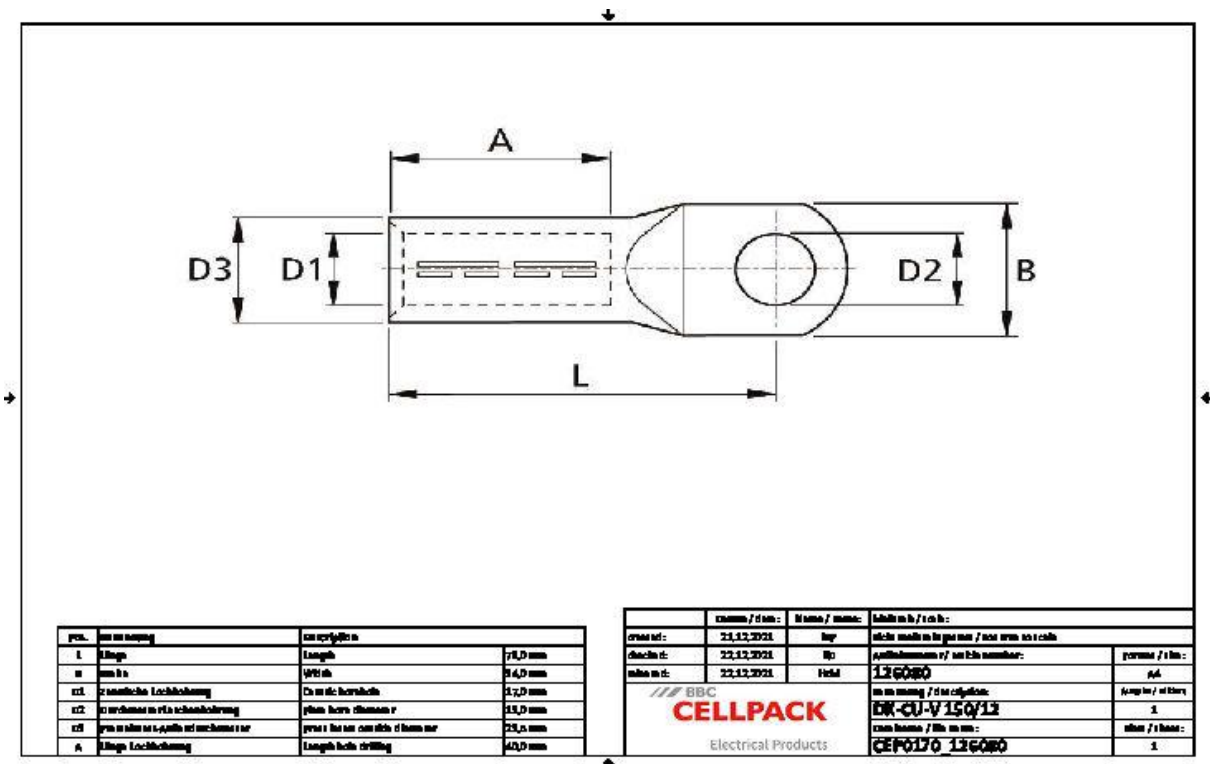

Article name	DK-CU-V 150/12
Article number	126080
Test standards	DIN 46235
	IEC 61238
Materials	Copper tin-plated
Length L	78 mm
Width B	34 mm
Diameter D1	17 mm
Diameter D2	13 mm
Diameter D3	23.5 mm
Nominal cross section min	150 mm ²
Press die code K	22 mm
Length A	40 mm

Logistics data

Article name	DK-CU-V 150/12
Article number	126080
Delivery scope	Compression cable lug
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311052564

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	50
Base unit of measure	Piece	Piece
Lenght (mm)	92	195
Width (mm)	31	145
Height (mm)	22	145
Net weight (kg)	0.161	8.05
Gross weight (kg)	0.161	8.35