

Compression cable lug Cu

for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




Product description

Article name	DK-CU-V 185/12
Article number	126085
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295)

Technical data

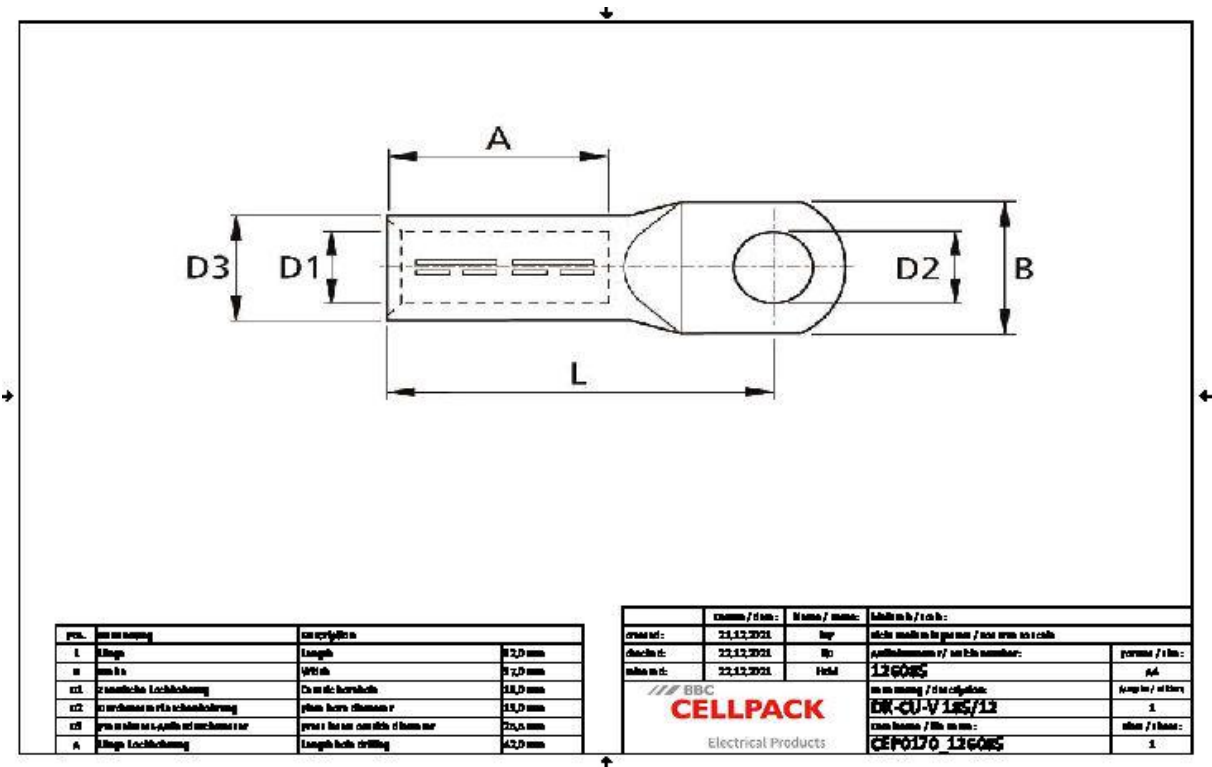

Article name	DK-CU-V 185/12
Article number	126085
Test standards	DIN 46235
	IEC 61238
Materials	Copper tin-plated
Length L	82 mm
Width B	37 mm
Diameter D1	19 mm
Diameter D2	13 mm
Diameter D3	25.5 mm
Nominal cross section min	185 mm <sup>2</sup>
Press die code K	25 mm
Length A	42 mm

## Logistics data

Article name	DK-CU-V 185/12
Article number	126085
Delivery scope	Compression cable lug
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311052588

## Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	50
Base unit of measure	Piece	Piece
Lenght (mm)	97	200
Width (mm)	33	140
Height (mm)	25	145
Net weight (kg)	0.183	9.15
Gross weight (kg)	0.183	9.45