

Compression cable lug Cu
for low and medium voltage

Cable lug (hexagonally compressed) for copper conductors, suitable for indoor cable terminations.




Product description

Article name	DK-CU-V 240/16
Article number	126091
Notes	To be used with suitable crimping tool with DIN inserts

Applications

Cable lug recommended for copper conductors RM/SM (class 2) according to DIN EN 60228 (VDE 0295)

Technical data

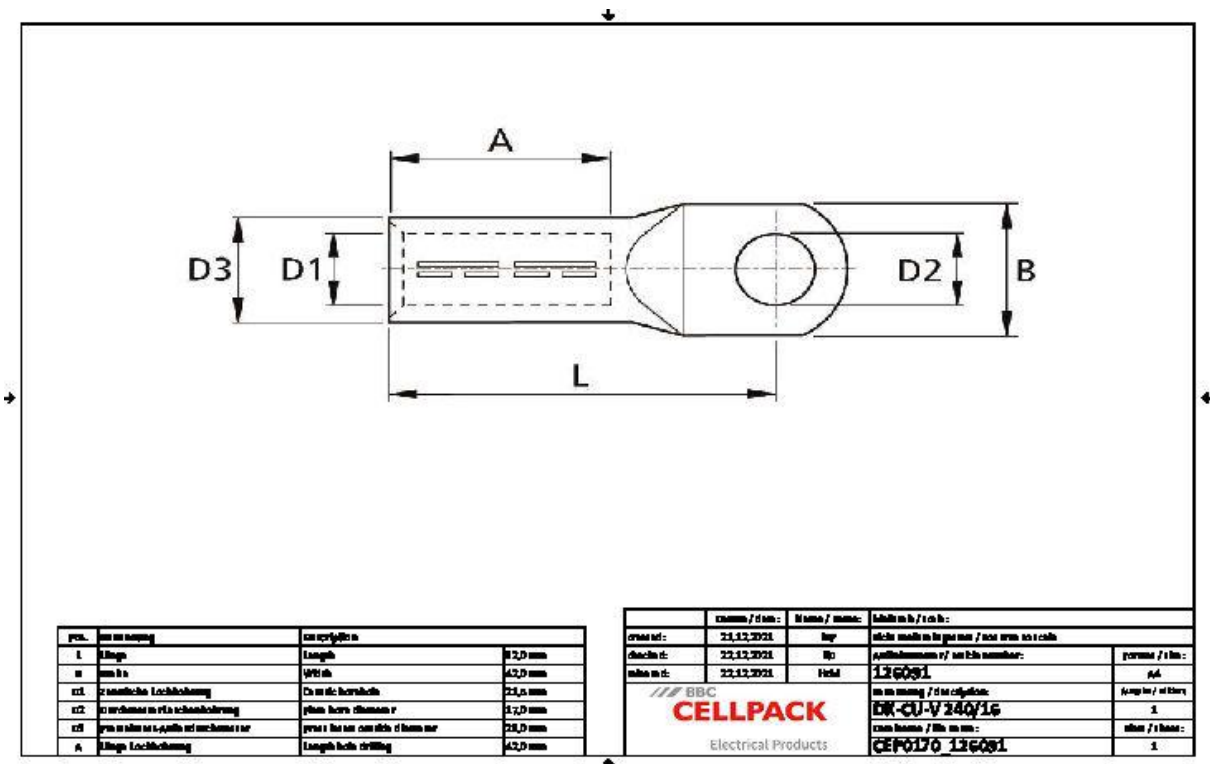

Article name	DK-CU-V 240/16
Article number	126091
Test standards	DIN 46235
	IEC 61238
Materials	Copper tin-plated
Length L	92 mm
Width B	42 mm
Diameter D1	21.5 mm
Diameter D2	17 mm
Diameter D3	29 mm
Nominal cross section min	240 mm ²
Press die code K	28 mm
Length A	42 mm

Logistics data

Article name	DK-CU-V 240/16
Article number	126091
Delivery scope	Compression cable lug
Country of origin	Poland
Customs tariff number	85369010
EAN/GTIN	4010311052618

Packaging data

Alternative unit of measure	Bag1	Carton
Base quantity	1	50
Base unit of measure	Piece	Piece
Lenght (mm)	109	290
Width (mm)	39	195
Height (mm)	27	145
Net weight (kg)	0.263	13.15
Gross weight (kg)	0.263	13.45