

Gel straight-through joint
without connection block

Universally suitable for connecting all polymeric cables and conductors (e.g. N(A)YY, NYM, H05), cross section range from 1.5 mm² to 25 mm². Suitable for aluminium and copper conductors.



Product description

Article name	EASYCELL 3
Article number	360368
Copyright	EASYCELL is a registered trademark of BBC Cellpack GmbH

Characteristics

- Connector area completely sealed by gel
- Re-accessible and ready for immediate operation
- Multiple type of connectors can be used, e. g. terminal strips, push wire connectors, mechanical blocks and c-crimp connectors


High-quality shockproof plastic shells, flame retardant and UV-resistant

Quick, safe and easy assembly

Applications

- Indoor (Laying in buildings and on cable racks)
- Outdoor
- Underground
- Water (according to test standard)

Technical data

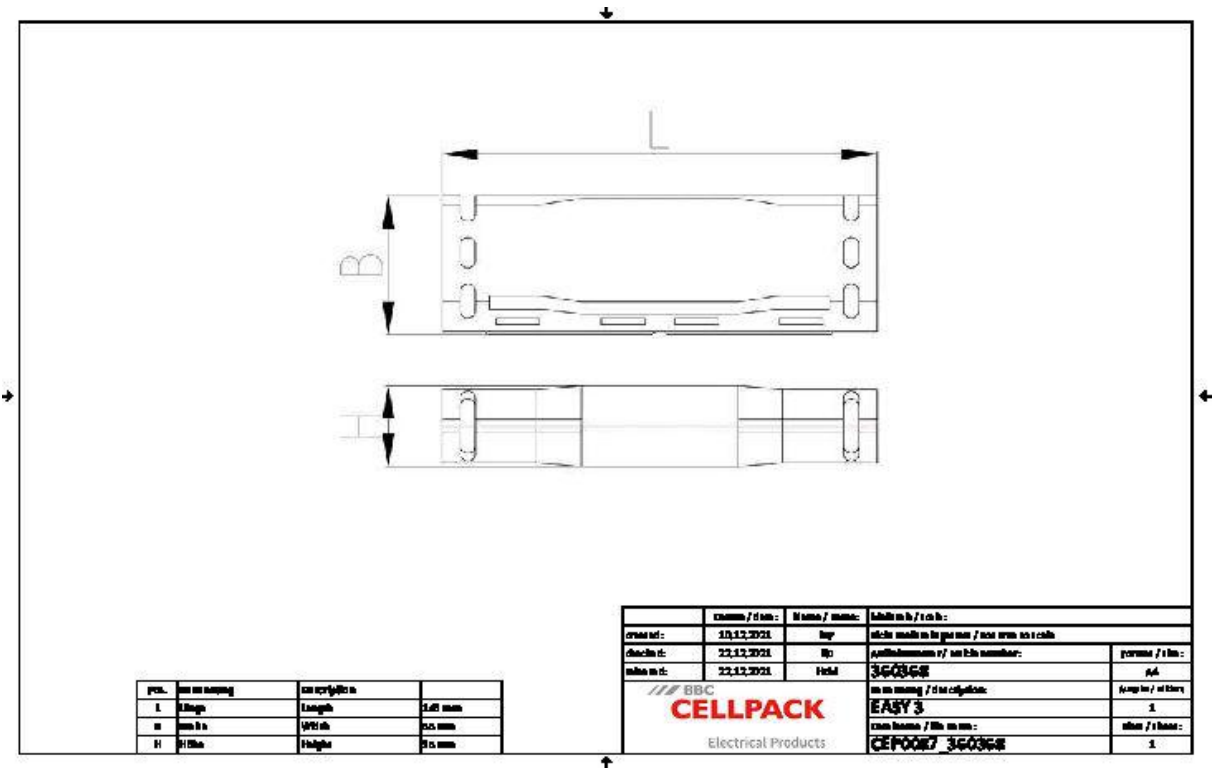

Article name	EASYCELL 3
Article number	360368
Voltage levels	U0/U (Um) 0,6/1 (1,2) kV
Test standards	EN 50393
	EN 60695-2-11
Housing type	3
Number of housing	1 Pieces
Length L	146 mm
Width B	55 mm
Heigth H	35 mm
Nominal cross section Polymeric cable unarmoured per conductor 3x min	1.5 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 3x max	6 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 4x min	1.5 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 4x max	6 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 5x min	1.5 mm ²
Nominal cross section Polymeric cable unarmoured per conductor 5x max	6 mm ²
Diameter cable min	11 mm
Diameter cable max	19 mm

Logistics data

Article name	EASYCELL 3
Article number	360368
Delivery scope	Gel straight-through joint
	Spacers
	Cable ties
	Assembly instructions
Shelf life description	Unlimited shelf life
Country of origin	Italy
Customs tariff number	85369010
EAN/GTIN	4010311174570

Packaging data

Alternative unit of measure	Case	Carton	Pal. OW
Base quantity	1	90	1620
Base unit of measure	Piece	Piece	Piece
Length (mm)	203	410	1200
Width (mm)	67	380	800
Height (mm)	45	370	1300
Net weight (kg)	0.185	16.65	299.7
Gross weight (kg)	0.185	16.95	317.9